

KATALOG

MOTORNA OLJA IN IZDELKI ZA
NEGO IN VZDRŽEVANJE VOZIL



PETROL

Energija za življenje

CELOVITA PONUDBA MOTORNIH OLJ IN TEKOČIN ZA VOZILA

Izbirajte med celovito ponudbo kakovostnih izdelkov in storitev za osebna, službena in gospodarska vozila.

Med njimi najdete:

- **Goriva Q Max**
- **Pnevmatike**
- **Motorna olja**
- **Avtokozmetika**
- **Vinjete za Slovenijo in tujino ter DarsGO**
- **Avtopralnice**
- **Servisne delavnice TipStop Vianor**

Poseben poudarek dajemo na motornih oljih in tekočinah ter izdelkih za vzdrževanje, ki jih tržimo pod lastno blagovno znamko. Izdelki, ki nosijo Petrolovo ime, so rezultat desetletij izkušenj, nenehnih inovacij in pozornega spremljanja razvoja avtomobilske industrije.

Pri tem nenehno stremimo ne le k vrhunskosti, ampak tudi k ekološki naravnosti. Motorna olja Petrol ter izdelke za nego in vzdrževanje najdete na vseh bencinskih servisih Petrol, v servisnih delavicah TipStop Vianor, v naši spletni trgovini Petrol eShop in pri pogodbenih serviserjih vozil.

✓ Pomen motornih olj

Motorna olja so nepogrešljivi del vsakega vozila. Brez kakovostnega motornega olja današnji avtomobili še zdaleč ne bi bili tako močni in zanesljivi. Motorno olje ne samo da maže motor, ampak ga tudi čisti in hladi. Ravno zato so današnja motorna olja visoko kakovostni izdelki, ki so narejeni na podlagi najso-dobnejših tehnologij.


Poznamo standardna mineralna motorna olja, delno sintetična motorna olja in visokokakovostna sintetična olja. Vsako od teh treh vrst ima svoje lastnosti in svoj namen uporabe.

✓ Izbira motornega olja

Kakovost motornih olj določajo mednarodne priznane spe-cifikacije in standardi ter proizvajalci vozil. Zajemajo tako olja za osebna kot za gospodarska vozila. Proizvajalci vozil vedno določijo zahtevano raven kakovosti motornega olja in njegovo priporočeno viskoznost. Viskoznost motornih olj se podaja s SAE razredi, npr. 5W-30, 5W-40, 10W-40, 15W-40 in podobno. Trend so lahkoketoča motorna olja z nižjo viskoznostjo, ki omogočajo prihranek pri porabi goriva.

✓ Interval menjave olja

Rok zamenjave motornega olja predpiše proizvajalec vozila. Ta rok se lahko prilaga (podaljšuje ali zmanjšuje) le pod pogoji, ki jih navede proizvajalec. Rok zamenjave motornega olja je odvisen tudi od načina vožnje. Mestna vožnja in vožnja obremenjenih vozil (npr. vleka prikolice) predstavlja zahteven način vožnje, pretežno relacijske vožnje pa normalen način vožnje.

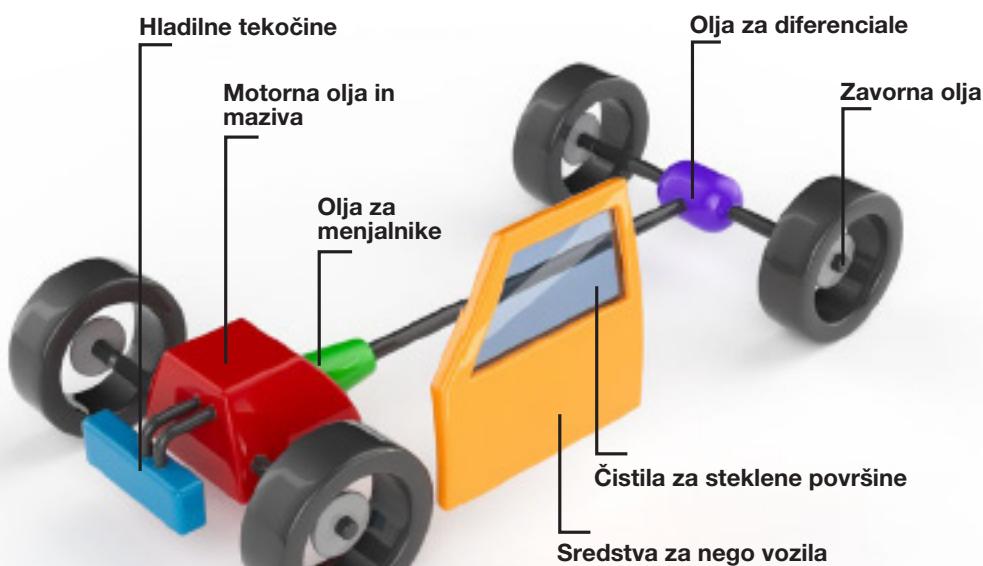


KAZALO / TABLE OF CONTENTS

MOTORNA OLJA ZA OSEBNA VOZILA	4	DODATKI ZA GORIVA - ADITIVI	19																																																																																																																																																																														
PASSENGER CAR MOTOR OILS																																																																																																																																																																																	
Sintetična motorna olja / Synthetic motor oils	4	ADDITIVES																																																																																																																																																																															
Premium Pro 0W-20 S1	4	Diesel Plus	19																																																																																																																																																																														
Premium Pro 5W-30 S3	4	Bencin Plus	19																																																																																																																																																																														
Premium Pro 5W-30 S2	5	DPF Cleaner Plus	19																																																																																																																																																																														
Premium Pro 5W-30 S1	5	AdBlue	20																																																																																																																																																																														
Premium Pro 5W-40 S2	6	Diesel Winter Protect	20																																																																																																																																																																														
Premium Pro 5W-40 S1	6	Ventil Plus	20																																																																																																																																																																														
Delno sintetična motorna olja / Semi-synthetic motor oils	7	HLADILNE TEKOČINE ANTIFRIZI	21																																																																																																																																																																														
Premium Pro 10W-40 SE1	7	COOLING - ANTI-FREEZE FLUIDS																																																																																																																																																																															
Premium Pro 15W-40 SE1	7	Mineralna motorna olja / Mineral motor oils	8	Antifriz Koncentrat	21	Premium Pro 20W-50 M1	8	Antifriz Max	21	MOTORNA OLJA ZA GOSPODARSKA VOZILA	9	Antifriz Plus	22	MOTOR OILS FOR HEAVY DIESEL VEHICLES				Sintetična motorna olja / Synthetic motor oils	9	Antifriz Universal	22	Ultra 5W-30 S2	9	Antifriz -40 °C	23	Ultra 5W-30 S1	9	Antifriz G13	23	Ultra 10W-30 S1	10	Antifriz G11	23	Delno sintetična motorna olja / Semi-synthetic motor oils	11	HIDRAVLIČNA OLJA	24	Ultra 10W-40 S2	11	HYDRAULIC OILS		Ultra 10W-40 S1	11	Univerzalna motorna olja / Universal motor oils	12	Hidrol HLP 32, HLP 46, HLP 68	24	Ultra 15W-40 M2	12	Hidrol HVLP 32, HVLP 46, HVLP 68	25	Ultra 15W-40 M1	12	OLJE ZA REDUKTORJE	26	Ultra 20W-50 M1	13	REDUCTION GEAR OILS		Ultra 30 M1	13	MOTORNA OLJA ZA DVOTAKTNE MOTORJE	14	Redol CLP 68, CLP 150, CLP 220	26	MOTOR OILS FOR TWO-STROKE PETROL ENGINES				2T Sint	14	MINERALNA OLJA	27	2T Top	14	MINERAL OILS		2T Scooter	14	OLJA ZA MENJALNIKE IN DIFERENCIALE	15	Polar 68, 150, 220	27	OILS FOR TRANSMISSIONS AND DIFFERENTIALS				REGULUS GL-5 80W-90	15	MASTI	28	REGULUS GL-5 85W-90	15	GREASES		REGULUS GL-5 85W-140	15	REGULUS Multi 75W-90	16	LIT 2	28	REGULUS ATF DX III	16	LIT EP 2	28	ZAVORNE TEKOČINE	16	SREDSTVA ZA VZDRŽEVANJE IN ČIŠČENJE	29	BRAKE FLUIDS				Brake fluid DOT 4 & 5.1	16	CARE PRODUCTS		ZELENI PROGRAM ZA KMETIJSTVO	17	Destilirana voda	29	GREEN PROGRAMME FOR AGRICULTURE				Biolub 46	17	Universal cleaner	29	Tratol	17	Motor Spray	29	Verigol Bio Plus	17	Avtosampon Nano	30	Verigol Bio Professional	17	Avtosampon Green Lemon	30	Verigol Mineral Plus	18	Avtosampon Shine	30	Agrotakt TDH Premium	18	Vitrex koncentrat Limeta	31		18	Vitrex koncentrat Summer breeze	31		18	Vitrex Vanilija	32		18	Vitrex Sivka	32		18	Vitrex zimski -38 °C	33		18	Vitrex zimski -20 °C jabolko	33		18	Odmrzovalec stekel	34		18	Osvežilec zraka Q	34
Mineralna motorna olja / Mineral motor oils	8	Antifriz Koncentrat	21																																																																																																																																																																														
Premium Pro 20W-50 M1	8	Antifriz Max	21																																																																																																																																																																														
MOTORNA OLJA ZA GOSPODARSKA VOZILA	9	Antifriz Plus	22																																																																																																																																																																														
MOTOR OILS FOR HEAVY DIESEL VEHICLES																																																																																																																																																																																	
Sintetična motorna olja / Synthetic motor oils	9	Antifriz Universal	22																																																																																																																																																																														
Ultra 5W-30 S2	9	Antifriz -40 °C	23																																																																																																																																																																														
Ultra 5W-30 S1	9	Antifriz G13	23																																																																																																																																																																														
Ultra 10W-30 S1	10	Antifriz G11	23																																																																																																																																																																														
Delno sintetična motorna olja / Semi-synthetic motor oils	11	HIDRAVLIČNA OLJA	24																																																																																																																																																																														
Ultra 10W-40 S2	11	HYDRAULIC OILS																																																																																																																																																																															
Ultra 10W-40 S1	11	Univerzalna motorna olja / Universal motor oils	12	Hidrol HLP 32, HLP 46, HLP 68	24	Ultra 15W-40 M2	12	Hidrol HVLP 32, HVLP 46, HVLP 68	25	Ultra 15W-40 M1	12	OLJE ZA REDUKTORJE	26	Ultra 20W-50 M1	13	REDUCTION GEAR OILS		Ultra 30 M1	13	MOTORNA OLJA ZA DVOTAKTNE MOTORJE	14	Redol CLP 68, CLP 150, CLP 220	26	MOTOR OILS FOR TWO-STROKE PETROL ENGINES				2T Sint	14	MINERALNA OLJA	27	2T Top	14	MINERAL OILS		2T Scooter	14	OLJA ZA MENJALNIKE IN DIFERENCIALE	15	Polar 68, 150, 220	27	OILS FOR TRANSMISSIONS AND DIFFERENTIALS				REGULUS GL-5 80W-90	15	MASTI	28	REGULUS GL-5 85W-90	15	GREASES		REGULUS GL-5 85W-140	15	REGULUS Multi 75W-90	16	LIT 2	28	REGULUS ATF DX III	16	LIT EP 2	28	ZAVORNE TEKOČINE	16	SREDSTVA ZA VZDRŽEVANJE IN ČIŠČENJE	29	BRAKE FLUIDS				Brake fluid DOT 4 & 5.1	16	CARE PRODUCTS		ZELENI PROGRAM ZA KMETIJSTVO	17	Destilirana voda	29	GREEN PROGRAMME FOR AGRICULTURE				Biolub 46	17	Universal cleaner	29	Tratol	17	Motor Spray	29	Verigol Bio Plus	17	Avtosampon Nano	30	Verigol Bio Professional	17	Avtosampon Green Lemon	30	Verigol Mineral Plus	18	Avtosampon Shine	30	Agrotakt TDH Premium	18	Vitrex koncentrat Limeta	31		18	Vitrex koncentrat Summer breeze	31		18	Vitrex Vanilija	32		18	Vitrex Sivka	32		18	Vitrex zimski -38 °C	33		18	Vitrex zimski -20 °C jabolko	33		18	Odmrzovalec stekel	34		18	Osvežilec zraka Q	34																																										
Univerzalna motorna olja / Universal motor oils	12	Hidrol HLP 32, HLP 46, HLP 68	24																																																																																																																																																																														
Ultra 15W-40 M2	12	Hidrol HVLP 32, HVLP 46, HVLP 68	25																																																																																																																																																																														
Ultra 15W-40 M1	12	OLJE ZA REDUKTORJE	26																																																																																																																																																																														
Ultra 20W-50 M1	13	REDUCTION GEAR OILS																																																																																																																																																																															
Ultra 30 M1	13	MOTORNA OLJA ZA DVOTAKTNE MOTORJE	14	Redol CLP 68, CLP 150, CLP 220	26	MOTOR OILS FOR TWO-STROKE PETROL ENGINES				2T Sint	14	MINERALNA OLJA	27	2T Top	14	MINERAL OILS		2T Scooter	14	OLJA ZA MENJALNIKE IN DIFERENCIALE	15	Polar 68, 150, 220	27	OILS FOR TRANSMISSIONS AND DIFFERENTIALS				REGULUS GL-5 80W-90	15	MASTI	28	REGULUS GL-5 85W-90	15	GREASES		REGULUS GL-5 85W-140	15	REGULUS Multi 75W-90	16	LIT 2	28	REGULUS ATF DX III	16	LIT EP 2	28	ZAVORNE TEKOČINE	16	SREDSTVA ZA VZDRŽEVANJE IN ČIŠČENJE	29	BRAKE FLUIDS				Brake fluid DOT 4 & 5.1	16	CARE PRODUCTS		ZELENI PROGRAM ZA KMETIJSTVO	17	Destilirana voda	29	GREEN PROGRAMME FOR AGRICULTURE				Biolub 46	17	Universal cleaner	29	Tratol	17	Motor Spray	29	Verigol Bio Plus	17	Avtosampon Nano	30	Verigol Bio Professional	17	Avtosampon Green Lemon	30	Verigol Mineral Plus	18	Avtosampon Shine	30	Agrotakt TDH Premium	18	Vitrex koncentrat Limeta	31		18	Vitrex koncentrat Summer breeze	31		18	Vitrex Vanilija	32		18	Vitrex Sivka	32		18	Vitrex zimski -38 °C	33		18	Vitrex zimski -20 °C jabolko	33		18	Odmrzovalec stekel	34		18	Osvežilec zraka Q	34																																																												
MOTORNA OLJA ZA DVOTAKTNE MOTORJE	14	Redol CLP 68, CLP 150, CLP 220	26																																																																																																																																																																														
MOTOR OILS FOR TWO-STROKE PETROL ENGINES																																																																																																																																																																																	
2T Sint	14	MINERALNA OLJA	27																																																																																																																																																																														
2T Top	14	MINERAL OILS																																																																																																																																																																															
2T Scooter	14	OLJA ZA MENJALNIKE IN DIFERENCIALE	15	Polar 68, 150, 220	27	OILS FOR TRANSMISSIONS AND DIFFERENTIALS				REGULUS GL-5 80W-90	15	MASTI	28	REGULUS GL-5 85W-90	15	GREASES		REGULUS GL-5 85W-140	15	REGULUS Multi 75W-90	16	LIT 2	28	REGULUS ATF DX III	16	LIT EP 2	28	ZAVORNE TEKOČINE	16	SREDSTVA ZA VZDRŽEVANJE IN ČIŠČENJE	29	BRAKE FLUIDS				Brake fluid DOT 4 & 5.1	16	CARE PRODUCTS		ZELENI PROGRAM ZA KMETIJSTVO	17	Destilirana voda	29	GREEN PROGRAMME FOR AGRICULTURE				Biolub 46	17	Universal cleaner	29	Tratol	17	Motor Spray	29	Verigol Bio Plus	17	Avtosampon Nano	30	Verigol Bio Professional	17	Avtosampon Green Lemon	30	Verigol Mineral Plus	18	Avtosampon Shine	30	Agrotakt TDH Premium	18	Vitrex koncentrat Limeta	31		18	Vitrex koncentrat Summer breeze	31		18	Vitrex Vanilija	32		18	Vitrex Sivka	32		18	Vitrex zimski -38 °C	33		18	Vitrex zimski -20 °C jabolko	33		18	Odmrzovalec stekel	34		18	Osvežilec zraka Q	34																																																																														
OLJA ZA MENJALNIKE IN DIFERENCIALE	15	Polar 68, 150, 220	27																																																																																																																																																																														
OILS FOR TRANSMISSIONS AND DIFFERENTIALS																																																																																																																																																																																	
REGULUS GL-5 80W-90	15	MASTI	28																																																																																																																																																																														
REGULUS GL-5 85W-90	15	GREASES																																																																																																																																																																															
REGULUS GL-5 85W-140	15	REGULUS Multi 75W-90	16	LIT 2	28	REGULUS ATF DX III	16	LIT EP 2	28	ZAVORNE TEKOČINE	16	SREDSTVA ZA VZDRŽEVANJE IN ČIŠČENJE	29	BRAKE FLUIDS				Brake fluid DOT 4 & 5.1	16	CARE PRODUCTS		ZELENI PROGRAM ZA KMETIJSTVO	17	Destilirana voda	29	GREEN PROGRAMME FOR AGRICULTURE				Biolub 46	17	Universal cleaner	29	Tratol	17	Motor Spray	29	Verigol Bio Plus	17	Avtosampon Nano	30	Verigol Bio Professional	17	Avtosampon Green Lemon	30	Verigol Mineral Plus	18	Avtosampon Shine	30	Agrotakt TDH Premium	18	Vitrex koncentrat Limeta	31		18	Vitrex koncentrat Summer breeze	31		18	Vitrex Vanilija	32		18	Vitrex Sivka	32		18	Vitrex zimski -38 °C	33		18	Vitrex zimski -20 °C jabolko	33		18	Odmrzovalec stekel	34		18	Osvežilec zraka Q	34																																																																																																
REGULUS Multi 75W-90	16	LIT 2	28																																																																																																																																																																														
REGULUS ATF DX III	16	LIT EP 2	28																																																																																																																																																																														
ZAVORNE TEKOČINE	16	SREDSTVA ZA VZDRŽEVANJE IN ČIŠČENJE	29																																																																																																																																																																														
BRAKE FLUIDS																																																																																																																																																																																	
Brake fluid DOT 4 & 5.1	16	CARE PRODUCTS																																																																																																																																																																															
ZELENI PROGRAM ZA KMETIJSTVO	17	Destilirana voda	29	GREEN PROGRAMME FOR AGRICULTURE				Biolub 46	17	Universal cleaner	29	Tratol	17	Motor Spray	29	Verigol Bio Plus	17	Avtosampon Nano	30	Verigol Bio Professional	17	Avtosampon Green Lemon	30	Verigol Mineral Plus	18	Avtosampon Shine	30	Agrotakt TDH Premium	18	Vitrex koncentrat Limeta	31		18	Vitrex koncentrat Summer breeze	31		18	Vitrex Vanilija	32		18	Vitrex Sivka	32		18	Vitrex zimski -38 °C	33		18	Vitrex zimski -20 °C jabolko	33		18	Odmrzovalec stekel	34		18	Osvežilec zraka Q	34																																																																																																																						
Destilirana voda	29																																																																																																																																																																																
GREEN PROGRAMME FOR AGRICULTURE																																																																																																																																																																																	
Biolub 46	17	Universal cleaner	29																																																																																																																																																																														
Tratol	17	Motor Spray	29																																																																																																																																																																														
Verigol Bio Plus	17	Avtosampon Nano	30																																																																																																																																																																														
Verigol Bio Professional	17	Avtosampon Green Lemon	30																																																																																																																																																																														
Verigol Mineral Plus	18	Avtosampon Shine	30																																																																																																																																																																														
Agrotakt TDH Premium	18	Vitrex koncentrat Limeta	31																																																																																																																																																																														
	18	Vitrex koncentrat Summer breeze	31																																																																																																																																																																														
	18	Vitrex Vanilija	32																																																																																																																																																																														
	18	Vitrex Sivka	32																																																																																																																																																																														
	18	Vitrex zimski -38 °C	33																																																																																																																																																																														
	18	Vitrex zimski -20 °C jabolko	33																																																																																																																																																																														
	18	Odmrzovalec stekel	34																																																																																																																																																																														
	18	Osvežilec zraka Q	34																																																																																																																																																																														

MOTORNA OLJA ZA OSEBNA VOZILA

PASSENGER CAR MOTOR OILS

SINTETIČNA MOTORNA OLJA / SYNTHETIC MOTOR OILS



PREMIUM PRO

0W-20 S1



PREMIUM PRO

5W-30 S3



ACEA C5 MID SAPS

viskoznost/specifikacije
viscosity/specifications

SAE 0W-20,
ACEA C5, A1/B1, PORSCHE C20, VW 508.00/509.00

SLO

Premium Pro 0W-20 S1 je sodobno zelo visokozmogljivo sintetično motorno olje za zelo zmogljive bencinske in dizelske motorje (s filterom trdnih delcev ali brez njega), posebej razvito motorno olje za sodobne Euro 6 bencinske in dizelske motorje osebnih vozil VOLKSWAGEN, ki zahtevajo uporabo motornega olja viskoznosti SAE 0W-20.

GB

Premium Pro 0W-20 S1 is a modern very high-performance synthetic engine oil for high-performance petrol and diesel engines (with or without particulate filters) and a specially developed engine oil for the modern Euro 6 petrol and diesel engines of VOLKSWAGEN passenger cars that require the use of engine oil with a viscosity of SAE 0W-20.

polnjenje / filling

plastenka 1 L; sod 60 L, 205 L
1L bottle; 60L, 205L barrel

ACEA C4 LOW SAPS

viskoznost/specifikacije
viscosity/specifications

SAE 5W-30,
ACEA C4, RENAULT RN 0720, MB 226.51/229.51/229.31

SLO

Premium Pro 5W-30 S3 je sintetično visokozmogljivo motorno olje, posebej razvito za nekatere bencinske in dizelske motorje s filterom trdnih delcev za osebna vozila RENAULT in NISSAN, ki zahtevajo olje zmogljivosti ACEA C4 in RN 0720.

GB

Premium Pro 5W-30 S3 is a high-performance synthetic engine oil specially developed for certain petrol and diesel engines with particulate filters (DPF) for RENAULT and NISSAN passenger cars requiring engine oil according to ACEA C4 and RN 0720 classifications.


polnjenje / filling

plastenka 1 L; sod 60 L, 205 L
1L bottle; 60L, 205L barrel

MOTORNA OLJA ZA OSEBNA VOZILA

PASSENGER CAR MOTOR OILS

SINTETIČNA MOTORNA OLJA / SYNTHETIC MOTOR OILS



PREMIUM PRO

5W-30 S2



PREMIUM PRO

5W-30 S1



ACEA C3 LOW SAPS

viskoznost/specifikacije
viscosity/specifications

SAE 5W-30,
ACEA C3, API SN, VW 504.00/507.00/502.00/503.00/503.01/505.01,
BMW LONGLIFE-04, MB 229.51/229.31, PORSCHE C30, FIAT
9.55535 S3

SLO

Premium Pro 5W-30 S2 je popolnoma sintetično motorno olje najvišjega kakovostnega razreda. Olje je primerno za uporabo v osebnih dizelskih in bencinskih motorjih s katalizatorji, filtri trdnih delcev (DPF) in ostalimi sistemmi za čiščenje izpušnih plinov. Posebej primerno za dizelske motorje VW/Audi/Seat/Škoda z DPF-filtri.

GB

Premium Pro 5W-30 S2 is a fully synthetic engine oil of the highest quality grade. The oil is suitable for use in personal diesel and petrol engines with catalysts, diesel particulate filters (DPF) and other exhaust gas cleaning systems. It is especially recommended for VW/Audi/Seat/Škoda diesel engines with particulate filters

polnjenje / filling

plastenka 1 L, 4 L; sod 60 L, 205 L
1L, 4L bottle; 60L, 205L barrel

ACEA C2 MID SAPS

viskoznost/specifikacije
viscosity/specifications

SAE 5W-30,
ACEA C2, A1/B1, A5/B5, API SN/CF,
PSA B 71-2290, IVECO 18-1811 SC1, RENAULT RN 0700,
FIAT 9.55535-S1

SLO

Premium Pro 5W-30 S1 je visokozmogljivo sintetično motorno olje za bencinske in dizelske motorje s filtrom trdnih delcev (DPF) za osebna in manjša dostavna vozila (Citroën, Honda, Peugeot, Toyota ...).

GB

Premium Pro 5W-30 S1 is a high-performance synthetic engine oil for petrol and diesel engines with particulate filters in passenger cars and delivery vans (Citroën, Honda, Peugeot, Toyota ...).


polnjenje / filling

sod 60 L, 205 L
60L, 205L barrel

MOTORNA OLJA ZA OSEBNA VOZILA

PASSENGER CAR MOTOR OILS

SINTETIČNA MOTORNA OLJA / SYNTHETIC MOTOR OILS



PREMIUM PRO

5W-40 S2



PREMIUM PRO

5W-40 S1



ACEA C3 MID SAPS

viskoznost/specifikacije
viscosity/specifications

SAE 5W-40,
ACEA C3, API SN/CF, FORD WSS-M2C-917A, GM DEXOS 2,
BMW LONGLIFE-04, MB 229.51/229.31/226.5, PORSCHE A40,
RENAULT RN 0700/0710, VW 505.00/505.01, FIAT 9.55535 S2

SLO

Premium Pro 5W-40 S2 je visokozmagljivo sintetično motorno olje za bencinske in dizelske motorje s filterom trdnih delcev (DPF) za osebna in manjša dostavna vozila (MB, BMW, VW ...). Najnovejša tehnologija aditiviranja ohranja motor čist, zmanjšuje trenje, omogoča podaljšane intervale menjave in visoko učinkovitost delovanja motorja.

GB

Premium Pro 5W-40 S2 is a high-performance synthetic engine oil for petrol and diesel engines with particulate filters (DPF) in passenger cars and delivery vans (MB, BMW, VW ...). The latest additive technology keeps the engine clean, reduces friction and enables extended oil change intervals and high-performance engine operation.

polnjenje / filling

plastenka 1 L, 4 L; sod 60 L, 205 L
1L, 4L bottle; 60L, 205L barrel

ACEA A3/B4

viskoznost/specifikacije
viscosity/specifications

SAE 5W-40,
ACEA A3/B4, A3/B3, API SN/CF, RN 0700/0710, MB 226.5/229.5,
PSA B71-2296, VW 502.00/505.00,
FIAT 9.55535-N2/ Z2

SLO

Premium Pro 5W-40 S1 je sintetično motorno olje za bencinske in dizelske motorje brez filtra trdnih delcev za osebna in manjša dostavna vozila.

GB

Premium Pro 5W-40 S1 is a synthetic engine oil for petrol and diesel engines without particulate filters in passenger cars and delivery vans.

polnjenje / filling

plastenka 1 L, 4 L; sod 60 L, 205 L
1L, 4L bottle; 60L, 205L barrel

MOTORNA OLJA ZA OSEBNA VOZILA

PASSENGER CAR MOTOR OILS

DELNO SINTETIČNA MOTORNA OLJA / SEMI-SYNTHETIC MOTOR OILS



PREMIUM PRO

10W-40 SE1



PREMIUM PRO

15W-40 SE1



ACEA A3/B4

viskoznost/specifikacije
viscosity/specifications

SAE 10W-40,
ACEA A3/B4, A3/B3, API SN/CF, VW 502.00/505.00,
MB 229.3, OPEL GM LL-A/B-025, RENAULT RN 0700/0710,
PSA B71 2294/B71-2300, FIAT 9.55535 G2

SLO

Premium Pro 10W-40 SE1 je delno sintetično motorno olje za najzahtevnejša osebna in manjša dostavna vozila. Omogoča lažji zagon hladnega motorja, manjšo porabo goriva ter zagotavlja vrhunsko zaščito motorjev v vseh pogojih delovanja.

GB

Premium Pro 10W-40 SE1 is a semi-synthetic motor oil recommended for high performance passenger cars and delivery vans. It provides easy starting of cold engine, lower fuel consumption and excellent protection of engines in all operating conditions.

polnjenje / filling

plastenka 1 L, 4 L; sod 60 L, 205 L; kontejner 1000 L
1L, 4L bottle; 60L, 205L barrel; 1000L container

ACEA A3/B4

viskoznost/specifikacije
viscosity/specifications

SAE 15W-40,
ACEA A3/B4, API SN/CF, VW 501.01/505.00, MB 229.1,
FIAT 9.55535 G2/D2

SLO

Premium Pro 15W-40 SE1 je univerzalno motorno olje, primerno za vse vrste osebnih in manjših dostavnih vozil. Zagotavlja odlično zaščito pred obrabo in korozijo ter preprečuje nastajanje usedlin v motorju.

GB

Premium Pro 15W-40 SE1 is a universal motor oil, suitable for all types of passenger cars and delivery vans. It provides outstanding performance with respect to anti-wear and corrosion resistance and prevents formation of engine deposits.


polnjenje / filling

plastenka 1 L, 4 L; sod 205 L
1L, 4L bottle; 205L barrel

MOTORNA OLJA ZA OSEBNA VOZILA

PASSENGER CAR MOTOR OILS

MINERALNA MOTORNA OLJA / MINERAL MOTOR OILS



PREMIUM PRO

20W-50 M1



SAE 20W-50

viskoznost/specifikacije
viscosity/specifications

SAE 20W-50,
API SL/CF

SLO

Premium Pro 20W-50 M1 je univerzalno motorno olje, primerno za vse vrste osebnih in manjših dostavnih vozil. Zaradi višje viskoznosti je še posebej primerno za starejša vozila. Zagotavlja odlicno zaščito pred obrabo in korozijo ter preprečuje nastajanje usedlin v motorju.

GB

Premium Pro 20W-50 M1 is a universal motor oil, suitable for all types of passenger cars and delivery vans. Due to its high viscosity, it is particularly recommended for older vehicles with oil consumption and pressure difficulties. It provides outstanding performance with respect to anti-wear and corrosion resistance and prevents formation of engine deposits.

polnjenje / filling

plastenka 1 L, 4 L
1L, 4L bottle

MOTORNA OLJA ZA GOSPODARSKA VOZILA

MOTOR OILS FOR COMMERCIAL VEHICLES

SINTETIČNA MOTORNA OLJA / SYNTHETIC MOTOR OILS



ULTRA

5W-30 S2



ULTRA

5W-30 S1



ACEA E4/E6/E7/E9 LOW SAPS

viskoznost/specifikacije
viscosity/specifications

SAE 5W-30,
ACEA E4/E6/E7/E9 API CJ-4/ CK-4, DEUTZ
DQC IV-18 LA, MACK EOS-4.5, MAN M
3777/3677/3575/3477/3271-1, MB 228.51/228.52 MTU OIL
CATEGORY 3.1, RENAULT VI RLD-3, VOLVO VDS-4.5, CATERPILLAR
ECF-3, CUMMINS CES 20081, DAF IVECO 18-1804 TLS E6, JASO
DH-2, SCANIA LA/ LDF-4

SLO
Ultra 5W-30 S2 je visokozmogljivo sintetično motorno olje z UHPD (Ultra High Performance Diesel) in fuel economy lastnostmi ter z nizko vsebnostjo pepela, žvepla in fosforja (Low SAPS olje). Ustreza zahtevam najnovejših EURO 6 dizelskih motorjev s turbopolnilnikom ali brez njega, za gospodarska vozila, agregate, plinske motorje in gradbeno mehanizacijo. Tehnologija aditiviranja motornega olja zagotavlja učinkovito detergentnost olja, vzdrževanje ustrezne disperzivnosti in odpornosti proti oksidaciji ter protipenilne lastnosti olja, zaščito motorja pred obrabo in pred korozijo.

GB
Ultra 5W-30 S2 high-performance synthetic engine lubricant with UHPD (Ultra High-Performance Diesel) and fuel economy properties, with a low ash, sulphur, and phosphorous content (Low SAPS oil). It meets the performance requirements of the latest EURO 6 naturally aspirated and turbocharged diesel engines, commercial vehicles, generators, gas engines, and construction machinery. The additive technology of engine lubricant ensures effective detergent properties of the lubricant, maintains appropriate dispersion, resistance to oxidation, and anti-foaming properties, and protects the engine against wear and corrosion.

polnjenje / filling
plastenka 4 L; sod 60 L, 205 L; kontejner 1000 L
4L bottle; 60L, 205L barrel; 1000L container

ACEA E4/E7 HIGH SAPS

viskoznost/specifikacije
viscosity/specifications

SAE 5W-30,
ACEA E4/E7, MB 228.5, MAN M3277, VOLVO VDS-3, MTU OIL
CAT. 3, RENAULT VI RLD-2/ RLD/RXD, DEUTZ DQC IV-10, MACK
EO-N, DAF, SCANIA LDF-3, CUMMINS CES 20077,
IVECO 18-1804 CLASSE TFE, FORD WSSM2C212-A1

SLO
Ultra 5W-30 S1 je popolnoma sintetično motorno olje z UHPD (Ultra High Performance Diesel) lastnostmi za varčevanje z gorivom. Olje je bilo razvito za nizkoemisijske dizelske motorje za komercialna vozila. Olje se odlikuje po manjši porabi goriva in višjem izkoristku motorja, zaščiti pred obrabo, korozijo, zagotavlja izjemne nizkotemperature lastnosti, omogoča dolge intervale zamenjave, zagotavlja ustrezno detergentnost.

GB
Ultra 5W-30 S1 is a fully synthetic, fuel economy motor oil with UHPD (Ultra High Performance Diesel) properties. The oil was developed specifically for the low-emission diesel engines of commercial vehicles. It is distinguished by its reduced oil consumption and higher engine efficiency. The oil provides protection against wear and corrosion, ensures excellent low-temperature properties, even after long oil change intervals, provides suitable detergent and prevents cylinder polishing.

polnjenje / filling
sod 60 L, 205 L
60L, 205L barrel

MOTORNA OLJA ZA GOSPODARSKA VOZILA

MOTOR OILS FOR COMMERCIAL VEHICLES

SINTETIČNA MOTORNA OLJA / SYNTHETIC MOTOR OILS



ULTRA

10W-30 S1



ACEA E9 LOW SAPS

viskoznost/specifikacije
viscosity/specifications

SAE 10W-30,
ACEA E9, API CK-4/ SN, MACK EO-S-4.5, RENAULT RLD-4/ RLD-3/
RLD-2, VOLVO VDS-4.5/ VDS-4/ VDS-3,
CATERPILLAR ECF 1-A/ 2/ 3, CUMMINS CES 20086, DETROIT
DIESEL 93K222, DEUTZ DQC III-10 LA, FORD M2C171-F1, MB
228.31, MAN M 3775, MTU OIL CATEGORY 2.1, GLOBAL DHD-1,
JASO DH-2

SLO

Ultra 10W-30 S1 je visokozmogljivo sintetično motorno olje z nizko vsebnostjo pepela, namenjeno predvsem sodobnim dizelskim motorjem komercialnih vozil, ki so opremljeni z DPF in/ali SCR. Olje zagotavlja s svojo formulacijo izredno nizke emisije izpušnih plinov, varuje okolje in DPF ter je posebej izdelano za dizelsko gorivo brez žvepla, zagotavlja podaljšan interval menjave v skladu z navodili proizvajalcev vozil in je primerno za uporabo skozi vso sezono, celo v ekstremnih razmerah

GB

Ultra 10W-30 S1 is a high-performance synthetic motor oil with a low ash content, predominantly intended for the modern diesel engines of commercial vehicles, equipped with DPF and/or SCR. The formulation of the oil ensures extremely low emissions of exhaust gas, protects the environment and DPF, and is made specifically for diesel fuel without sulphur. It ensures an extended oil changing interval in accordance with the vehicle manufacturer's instructions and is suitable for use in all seasons, even under extreme conditions

polnjenje / filling

sod 60 L, 205 L; kontejner 1000 L
60L, 205L barrel; 1000 L container

MOTORNA OLJA ZA GOSPODARSKA VOZILA

MOTOR OILS FOR COMMERCIAL VEHICLES

DELNO SINTETIČNA MOTORNA OLJA / SEMI-SYNTHETIC MOTOR OILS



ULTRA

10W-40 S2



ACEA E6/E7/E9 LOW SAPS

viskoznost/specifikacije
viscosity/specifications

SAE 10W-40,
ACEA E6/E7/E9, API CI-4, MB 228.51, MAN M3477, MAN M3271-1, VOLVO VDS-3, VOLVO VDS 2, DAF, RENAULT RLD-2, RD-2, RLD, RXD, RGD, RD - MTU OIL CAT. 3.1, DEUTZ DQC - IV - 10 LA, MACK EO-N/EO-M PLUS, CUMMINS CES 20076/ 20077, JASO DH-2

SLO

Ultra 10W-40 S2 je visokozmogljivo delno sintetično motorno UHDP-olje, namenjeno najnovejšim dizelskim motorjem EURO 4/5/6, ki zahtevajo uporabo olja z nizko vsebnostjo pepela, žvepla in fosforja (Low SAPS), kar zagotavlja izvrstno zaščito motorjev z DPF/CRT-tehnologijo čiščenja izpušnih plinov. Olje je primerno tudi za motorje s SCR/AdBlue tehnologijo. Olje omogoča najdaljše intervale menjave in zagotavlja vsestransko zaščito motorjev v najtežjih pogojih delovanja.

GB

Ultra 10W-40 S2 is a high performance semi-synthetic UHDP motor oil, intended for the latest EURO 4/5/6 diesel engines requiring the use of oils with a low sulphated ash, phosphorus and sulphur content (Low SAPS). It provides excellent protection for engines with DPF/CRT technology for exhaust gas purification. This oil is also suitable for engines with SCR/AdBlue technology. It provides the longest oil change intervals and universal engine protection in all operating conditions.

polnjenje / filling

plastenka 4 L; sod 60 L, 205 L; kontejner 1000 L
4L bottle; 60L, 205L barrel; 1000L container

ULTRA

10W-40 S1



ACEA E4/E7 HIGH SAPS

viskoznost/specifikacije
viscosity/specifications

SAE 10W-40,
ACEA E4/E7, API CI-4, MB 228.5, MAN M3277, VOLVO VDS-3, VDS-2, SCANIA LDF-2/ LDF, RENAULT TRUCKS RLD-2/ RLD/ RXD/ RD/ RD-2, MTU OIL CATEGORY 3, MACK EO-N/ EO-M PLUS/ EO-M, DEUTZ DQC III-10, VOITH RETARDER A, CUMMINS CES 20071/20072/20076/20077/20078, DETROIT DIESEL DFS 93K215, GLOBAL DHD-1, DAF EXTENDED DRAIN (EURO 0 DO III)

SLO

Ultra 10W-40 S1 je delno sintetično motorno UHDP olje, ki popolnoma ustreza in celo presega zahteve proizvajalcev težkih dieselskih motorjev. Omogoča najdaljše intervale menjave olja ter zagotavlja vsestransko zaščito motorja v najtežjih pogojih delovanja. Primerno za tovorna vozila brez DPF ali CRT.

GB

Ultra 10W-40 S1 is partly synthetic UHDP motor oil, which meets and even exceeding the requirements of manufacturers in heavy-duty Diesel engines. It provides the longest oil change intervals and universal engine protection in all operating conditions. Suitable for trucks with no DPF or CRT.

polnjenje / filling

sod 60 L, 205 L; kontejner 1000 L
60L, 205L barrel; 1000L container

MOTORNA OLJA ZA GOSPODARSKA VOZILA

MOTOR OILS FOR COMMERCIAL VEHICLES

UNIVERZALNA MOTORNA OLJA / UNIVERSAL MOTOR OILS



ULTRA

15W-40 M2



ULTRA

15W-40 M1



ACEA E9/E7 LOW SAPS

viskoznost/specifikacije
viscosity/specifications

SAE 15W-40,
ACEA E9/E7, API CJ-4/CI-4 PLUS/SM, DEUTZ DQC III-10 LA,
CUMMINS CES 20081/20071/20072/20077, MB 228.31, MAN
M3575, VOLVO VDS-4/VDS-3/VDS-2, RENAULT RLD-3'/RLD-
2/RD/RD-2/RLD, CATERPILLAR ECF-3/ECF-2, MACK EO-N/
EO-O PREMIUM PLUS/EO-M PLUS/EO-M, DETROIT DIESEL
DDC93K218, MTU CATEGORY 2.1, JASO DH-2, FORD WSS-
M2C171-E, ZF TE-ML 04C, DAF STANDARD DRAIN (EURO 0-VI)

SLO

ULTRA 15W-40 M2 je visokozmogljivo motorno olje z UHPD (Ultra High Performance Diesel) lastnostmi, namenjeno za uporabo v motorjih EURO 4 & 5 & 6. ULTRA 15W-40 M2 je motorno olje, ki nudi izvrstne zmogljivosti motorja pri uporabi goriva z izredno nizko vsebnostjo žvepla, kot tudi za goriva z normalno in višjo vsebnostjo žvepla.

GB

Ultra 15W-40 M2 is a high capacity motor oil with UHPD (Ultra High Performance Diesel) properties, intended for use in motors EURO 4 & 5 & 6. Ultra 15W-40 M2 is a motor oil, which offers excellent capacities of the engine while using fuel with an extremely low level of sulphur, as well as for fuels with normal and lower sulphur levels.

polnjenje / filling

sod 205 L
205L barrel

ACEA E7/A3/B4 HIGH SAPS

viskoznost/specifikacije
viscosity/specifications

SAE 15W-40,
ACEA E7/A3/B4, API CI-4/CH-4, MB 228.3/ 229.1, MAN M3275-1,
VOLVO VDS-3/ VDS-2, MACK EO-N, RENAULT TRUCKS RLD-2/
RD/ RD-2/ RLD, MTU OIL CATEGORY 2, ALLISON C-4, JASO DH-1,
GLOBAL DHD-1, CUMMINS CES 20071/20072/20076/20077/20078,
DEUTZ DQC III-10, DETROIT DIESEL DFS93K215, DAF STANDARD
DRAIN (EURO 0 - III)

SLO

Ultra 15W-40 M1 je vrhunsko SHPD motorno olje za najbolj obremenjena težka dizelska vozila. Zagotavlja vsestransko zaščito motorja v vseh pogojih delovanja. Ustreza zahtevam EURO 1-5 motorjev s SCR in EGR (brez DPF).

GB

Ultra 15W-40 M1 is a top quality, SHPD motor oil for heavy duty diesel vehicles. It provides excellent engine protection in all operating conditions. Suitable for EURO 1-5 engines with SCR and EGR (without DPF).


polnjenje / filling

plastenka 4 L, 10 L; sod 60 L, 205 L; kontejner 1000 L
4L,10L bottle; 60L, 205L barrel; 1000L container

MOTORNA OLJA ZA GOSPODARSKA VOZILA

MOTOR OILS FOR COMMERCIAL VEHICLES

UNIVERZALNA MOTORNA OLJA / UNIVERSAL MOTOR OILS



ULTRA

20W-50 M1

ULTRA

30 M1



ACEA E2

viskoznost/specifikacije
viscosity/specifications

SAE 20W-50,
ACEA E2, API CG-4, MB 228.3/229.1, MAN M 3275-1

SLO

Ultra 20W-50 M1 je univerzalno visokomogljivo motorno olje za mešane vozne parke. Zaradi višje viskoznosti je še posebej primerno za starejša vozila, pri katerih se pojavljajo težave zaradi prevelike porabe olja in zaradi oljnega tlaka.

GB

Ultra 20W-50 M1 is a universal high performance mixed fleet engine motor oil. Due to its high viscosity, it is particularly recommended for older vehicles with oil consumption and pressure difficulties.

polnjenje / filling

plastenka 4 L, 10 L; sod 205 L
4L, 10L bottle; 205L barrel

ACEA E2

viskoznost/specifikacije
viscosity/specifications

SAE 30,
ACEA E2, API CF, MAN M3275-2, MB 228.2, MTU OIL CAT.2

SLO

ULTRA 30 M1 je enogradacijsko motorno olje za najtežje obremenjene dieselske motorje. Motorno olje ULTRA 30 M1 vsebuje dodatek za zaščito pred obrabo, za preprečevanje korozije in detergentne dodatke, ki zagotavljajo čistočo motorja.

GB

Ultra 30 M1 is a single-grade motor oil for the most heavily loaded diesel engines. ULTRA 30 M1 motor oil contains anti-wear and anti-corrosion additives, as well as detergent additives that clean the engine.

polnjenje / filling

sod 205 L
205L barrel

MOTORNA OLJA ZA DVOTAKTNE MOTORJE

MOTOR OILS FOR TWO-STROKE PETROL ENGINES



2T

SINT



FULLY SYNTHETIC

specifikacije specifications

**ISO L-EGD, JASO FD, API TC,
HUSQVARNA HVA 346 DETERGENCY,
HUSQVARNA HVA 372 LUBRICITY, ROTAX
SNOWMOBILE**

SLO

Sint 2T je visoko zmogljivo, popolnoma sintetično motorno olje za pripravo mešanice za dvotaktne bencinske motorje. Zagotavlja odlično mazanje najbolj obremenjenih dvotaktnih motorjev v modernih motornih kolesih, kartih in snežnih saneh (tudi za tekmovanja), mopedih, malih kmetijskih strojih, motornih žagah, vrtnih kosilnicah, kosah in podobnih strojih. Način uporabe: Priporočeno razmerje mešanja olje : gorivo = 1 : 50 (2 %) oz. po navodilih proizvajalca motorja.

GB

Sint 2T is a heavy-duty, race proven motor oil completely miscible with gasoline and therefore suitable for lubrication of two-stroke engines. It provides excellent lubrication of extremely loaded two-stroke engines in all modern types of motorcycles, karts and motor sleds (also for racing), motor scooters, light farm machinery, power saws, lawn mowers, scythes and similar devices. Use: Recommended ratio of oil : fuel mixture = 1 : 50 (2 %), or in accordance with the engine manufacturer's instructions.

polnjenje / filling

plastenka 1 L, 500 ML, 100 ML
1L, 500ML, 100ML bottle

2T

TOP



UNIVERSAL

specifikacije specifications

**ISO L-EGD/EGC, JASO FD/FC, API TC, TISI
1040**

SLO

2T Top je univerzalno olje za pripravo mešanice za dvotaktne bencinske motorje. Primerno je za mazanje dvotaktnih motorjev v motornih kolesih in mopedih, malih kmetijskih strojih in vrtnih kosilnicah, malih zunajkrmih motorjih in podobnih strojih. Način uporabe: Priporočeno razmerje mešanja olje : gorivo = 1 : 50 (2 %) oz. po navodilih proizvajalca motorja.

GB

2T Top is a universal motor oil completely miscible with gasoline and therefore suitable for lubrication of two-stroke engines. It is recommended for the lubrication of two-stroke engines in motorcycles and motor scooters, light farm machinery, lawn mowers, small outboard engines and similar devices. Use: Recommended ratio of oil : fuel mixture = 1 : 50 (2 %), or in accordance with the engine manufacturer's instructions.

polnjenje / filling

plastenka 1 L, 500 ML
1L, 500ML bottle

2T

SCOOTER



SCOOTER OIL

specifikacije specifications

ISO L-EGD, JASO FD, API TC

SLO

2T Scooter je visokokakovostno sintetično olje za dvotaktne motorje skuterjev. Kombinacija izbranega baznega olja ter visokokakovostnih aditivov zagotavlja hitro, homogeno in stabilno mešanje olja z gorivom, odlikuje se tudi po majhnji dimnosti, zmanjšuje obrabo in s tem podaljšuje življenjsko dobo motorja. Način uporabe: Priporočeno razmerje mešanja olje : gorivo = 1 : 50 (2 %) oz. po navodilih proizvajalca motorja.

GB


2T Scooter is a high-quality synthetic oil for two-stroke scooter motors. The combination of the selected base oil and high-quality additives provides fast, homogeneous and stable mixing of fuel oil, and is also distinguished by low amounts of smoke and wear reduction and thereby prolongs the engine life. Use: Recommended ratio of oil : fuel mixture = 1 : 50 (2 %), or in accordance with the engine manufacturer's instructions

polnjenje / filling

plastenka 1 L, 500 ML
1L, 500ML bottle

OLJA ZA MENJALNIKE IN DIFERENCIALE

OILS FOR TRANSMISSIONS AND DIFFERENTIALS



REGULUS GL-5 80W-90



HYPOID OIL

viskoznost/specifikacije
viscosity/specifications

SAE 80W-90,
API GL-5, MAN 342 TYPE M1, MB 235.0,
MIL-L-2105D, VOITH 3.325-339, VOLVO
97310, ZF TE-ML 07A/ 08/ 16B/ 17B/ 19B/
21A

SLO

Regulus GL-5 80W-90 je večgradacijsko hipoidno olje, namenjeno mazanju zelo obremenjenih diferencialov, menjalnikov in ostalih zobiških prenosov, pri katerih se zahteva olje vrste API GL-5.

GB

Regulus GL-5 80W-90 is a multigrade hypoid oil designed for use in extremely loaded hypoid rear axles, transaxles and transmission gearboxes that specify an EP oil meeting API GL-5.

polnjenje / filling

sod 60 L, 205 L; kontejner 1000 L
60L, 205L barrel; 1000L container

REGULUS GL-5 85W-90



HYPOID OIL

viskoznost/specifikacije
viscosity/specifications

SAE 85W-90,
API GL-5, MAN 342 M1, MB 235.0, MIL-L-
2105D, STEYR G, TATRA TDS 80/32, VOITH
3.325-339/ VSN 6086/19/20, VOLVO 97310,
FENDT, FORD M2C-94A, ZF TE-ML 07A/
08/ 16C/ 17B/ 19B/ 21A

SLO

Regulus GL-5 85W-90 je večgradacijsko hipoidno olje, namenjeno mazanju zelo obremenjenih diferencialov, menjalnikov in ostalih zobiških prenosov, pri katerih se zahteva olje vrste API GL-5.

GB

Regulus GL-5 85W-90 is a multigrade hypoid oil designed for use in extremely loaded hypoid rear axles, transaxles and transmission gearboxes that specify an EP oil meeting API GL-5.

polnjenje / filling

plastenka 1 L, 4 L; sod 60 L, 205 L kontejner
1000 L
1L, 4L bottle; 60L, 205L barrel; 1000L container

REGULUS GL-5 85W-140



HYPOID OIL

viskoznost/specifikacije
viscosity/specifications

SAE 85W-140,
API GL-5, MIL L-2105D, VOLVO 97310,
ZF TE-ML 07A/ 08/ 16D/ 17B/ 21A

SLO

Regulus GL-5 85W-140 je večgradacijsko hipoidno olje, namenjeno mazanju zelo obremenjenih diferencialov, menjalnikov in ostalih zobiških prenosov, pri katerih se zahteva olje vrste API GL-5.

GB

Regulus GL-5 85W-140 is a multigrade hypoid oil designed for use in extremely loaded hypoid rear axles, transaxles and transmission gearboxes that specify an EP oil meeting API GL-5.

polnjenje / filling

plastenka 1 L; sod 60 L, 205 L; kontejner 1000 L
1L bottle; 60L, 205L barrel; 1000L container

**OLJA ZA MENJALNIKE IN
DIFERENCIALE**
**OILS FOR TRANSMISSIONS AND
DIFFERENTIALS**

**REGULUS MULTI
75W-90**



GEAR AND HYPOID OIL

viskoznost/specifikacije
viscosity/specifications

SAE 75W-90,
API GL-4/ GL-5/ MT-1, MIL PRF 2105 E,
SAE J2360, MAN 341 TYP E2/E3/Z2, 342
TYP M3/S1, MB 235.0/235.8, SCANIA STO
1:0, VOLVO 97312, ZF TE-ML 02B/ 05A/
07A/ 08/ 12B/ 12L/ 12N/ 16F/ 17B/ 19C/
21A

SLO


Regulus Multi 75W-90 je popolnoma sintetično večgradacijsko olje namenjeno mazanju vseh vrst zobiških prenosnikov, kjer se priporočajo olja specifikacije API GL-4 (ročni menjalniki, reduktorji...), kot tudi specifikacije API GL-5 (diferenciali, planetna gonila...).

GB

Regulus Multi 75W-90 is a fully synthetic multigrade gear and hypoid oil used for manual transmissions and final drive units where API GL-4 and API GL-5 oils are specified.

polnjenje / filling

sod 60 L, 205 L; kontejner 1000 L
60L, 205L barrel; 1000L container



**REGULUS ATF
DX III**



AUTOMATIC TRANSMISSION FLUID

viskoznost/specifikacije
viscosity/specifications

ALLISON C-4, CATERPILLAR TO-2, MB
236.1, MAN 339 TYPE Z1/ L1/ V1, VOITH
H55.6335.XX, GM DEXRON-II(D/ III-G, ZF
TE-ML 04D/11A/11B/14A/17C, RBAS TE-
ML 09, VOLVO 97340/97341

SLO

Regulus ATF DX III je visokokakovostno olje za avtomatske menjalnike osebnih in tovornih vozil. Primeren je tudi za hidravlične (servo) volane in ostale hidravlične sisteme, kjer se zahteva večgradacijsko hidravlično olje VG 32.

GB

Regulus ATF DX III is a high quality automatic transmissions fluid for modern passenger cars, trucks and off-highway transmission. It can be used as a power steering fluid and in other hydraulic systems requiring VG 32 multigrade hydraulic oil.

polnjenje / filling

plastenka 1 L, 4 L; sod 60 L, 205 L; kontejner
1000 L
1L, 4L bottle; 60L, 205L barrel; 1000L container



**ZAVORNE
TEKOČINE**
**BRAKE
FLUIDS**

BRAKE FLUID
DOT 4 & 5.1



**BRAKE FLUID FOR HYDRAULIC BRAKE
AND CLUTCH SYSTEMS**

specifikacije
specifications

FMVSS NO.116 DOT 3, DOT 4, DOT 5.1,
SAE J 1703/ J 1704,
ISO 4925 CLASS 6, JIS K 2233 CLASS 6

SLO

Petrol Brake Fluid DOT 4&5.1 je zavorna tekočina, ki jo lahko uporabljamo v vseh vrstah hidravličnih zavornih sistemov ter hidravličnih sklopov, ki zahtevajo uporabo zavorne tekočine DOT 5.1, DOT 4 ali DOT 3. Izdelana je na osnovi glikolnih etrov in dodatkov za izboljšanje mazalnih lastnosti ter dodatkov proti koroziji in oksidaciji.

Opozorilo: ni primerno za vozila, ki za centralni zavorni sistem uporabljajo mineralno olje, škodljivo vpliva na lakirane površine, plastenka je samo za enkratno uporabo, lahko se meša z zavornimi tekočinami, ki izpolnjujejo enake zahteve.

GB

Petrol Brake Fluid DOT 4&5.1 is a brake fluid for all hydraulic brake and clutch systems which complies with specification DOT 5.1, DOT 4 or DOT 3. Brake Fluid DOT 4&5.1 has been formulated from glycol ethers. It contains effective lubricants, corrosion inhibitors and antioxidants.

Please observe: not suitable for vehicles equipped with central hydraulic systems, based on mineral oil, brake fluid attacks paintwork, do not refill the container, miscible with brake fluids of similar specification.

polnjenje / filling
plastenka 500 ML
500 ML bottle

ZELENI PROGRAM ZA KMETIJSTVO

GREEN PROGRAMME FOR AGRICULTURE



BIOLUB

46



BIODEGRADABLE HYDRAULIC OIL

viskoznost/specifikacije
viscosity/specifications

BIOLOŠKA RAZGRADLJIVOST: 76 %
(OECD 301 F),
ISO VG 46, ISO-L-HETG

SLO

Biolub 46 je bioško razgradljivo hidravlično olje, izdelano na osnovi oljne repice. Olje je posebej primerno za vsa tista področja uporabe, kjer obstaja možnost onesnaženja zemlje ali vode z mazivom (traktorska hidravlika, poljedelski, gozdarski, gradbeni stroji, vodne zapornice ...).

GB

Biolub 46 is a biodegradable hydraulic oil based on rape-seed oil. It is particularly recommended for all areas of application where soil or water may be polluted with lubricants (tractor hydraulic systems, farm machinery, heavy machinery, canal locks ...).

polnjenje / filling

plastenka 10 L; sod 205 L
10L bottle; 205L barrel

TRATOL



4-T HOBBY OIL

viskoznost/specifikacije
viscosity/specifications

SAE 30
API SJ /CF, ACEA E2

SLO

Tratol je kakovostno motorno olje za mazanje 4-taktnih vrtnih kosilnic. Lahko ga uporabljamo tudi za manjše motokultivatorje, traktorje in ostalo vrtno mehanizacijo, saj je prilagojeno specifičnim lastnostim njihovega delovanja (prah, umazanija, velike obremenitve, visoke temperature ...).

GB

Tratol is a quality motor oil designed for lubricating four-stroke lawn mower engines. Other applications include: rotary cultivators, tractors and other garden machinery. Due to its special properties, it is suitable for use in all conditions (dust, dirt, high temperatures ...).

polnjenje / filling

plastenka 1 L
1L bottle

VERIGOL

BIO PLUS



BIODEGRADABLE CHAIN SAW OIL

specifikacije
specifications

BIOLOŠKA RAZGRADLJIVOST: 78 %
(OECD 301 B),
HUSQVARNA, STIHL, SOLO, DOLMAR,
JONSERED, PARTNER, ...

SLO

Verigol Bio Plus je vrhunsko bioško razgradljivo olje za verige gozdarskih žag. Odlikujejo ga dobra bioška razgradljivost, odlična mazalnost, oprjemljivost in lepljivost ter korozjska zaščita.

GB

Verigol Bio Plus is a top quality, biodegradable oil designed for lubricating power saw chains. It provides good biological degradability, excellent lubricating capacity, adhesiveness and corrosion resistance.

polnjenje / filling

plastenka 1 L, 4 L; sod 205 L;
kontejner 1000 L
1L, 4L bottle; 205L barrel;
1000L container

ZELENI PROGRAM ZA KMETIJSTVO

GREEN PROGRAMME FOR AGRICULTURE



VERIGOL BIO PROFESSIONAL



**BIODEGRADABLE PROFESSIONAL
CHAIN SAW OIL**

**specifikacije
specifications**

SIST 1017, HUSQVARNA, STIHL, SOLO,
DOLMAR, JONSERED, PARTNER, ...

SLO

Verigol Bio Professional je vrhunsko biološko razgradljivo olje za mazanje verig motornih gozdarskih žag. Zaradi izredno dobre oprijemljivosti (tvorjenje nitk) in visoke viskoznosti je še posebej prilagojen zahtevam modernih motornih žag, ki dosegajo visoke vrtline hitrosti. Verigol Bio Professional pokaže svojo prednost pri najtežjih pogojih dela, s katerimi se srečujejo profesionalni uporabniki.

GB

Verigol Bio Professional is a top quality, biodegradable oil designed for lubricating power saw chains. Due to the extremely good adhesion (forming threads) and high viscosity it is particularly adapted to the requirements of modern chain saws, which rotate at high speed. Verigol Bio Professional shows his advantage at harshest environments, faced by professional users.

polnjenje / filling

plastenka 20 L; sod 205 L; kontejner 1000 L
20L bottle; 205L barrel; 1000L container

VERIGOL MINERAL PLUS



MINERAL CHAIN SAW OIL

**specifikacije
specifications**

SIST 1017, HUSQVARNA, STIHL, SOLO,
DOLMAR, JONSERED, PARTNER, ...

SLO

Verigol Mineral Plus je vrhunsko mineralno olje za verige gozdarskih žag. Odlikuje se po dobrri oprijemljivosti in lepljivosti, odlični mazalnosti in koroziski zaščiti.

GB

Verigol Mineral Plus is a top quality oil designed for lubricating power saw chains. It provides excellent lubricating capacity, adhesiveness and corrosion protection.

polnjenje / filling

plastenka 1 L, 4 L; sod 205 L; kontejner
1000 L
1L, 4L bottle; 205L barrel; 1000L container

AGROTRAK TDH PREMIUM



UTTO OIL

**viskoznost/specifikacije
viscosity/specifications**

SAE 10W-30/15W-30/80W,
API GL 4, VOLVO 97303 (WB 101), CASE
NEW HOLLAND CNH MAT 3505/3525, JOHN
DERE JDM J20C, MASSEY FERGUSON
CMS M1135/1141/M1143/M1145, ZF TE
ML 03E/05F/17E/21F, CASE CORP. JIC
143/145 MS 1206/1207/1209/1210, FORD
NEW HOLLAND ESN-M2C134-D/FNHA-
2-C-201.00, INTERNATIONAL HARVEST B6,
KUBOTA UDT, MINNEAPOLIS MORLINE Q
1722/1766/1766B/1705, OLIVER Q-1705, RENK
DOROMAT 874A/B, CATERPILLAR TO-2,
WHITE FARM EQUIPMENT Q-1826

SLO

Visokokakovostno univerzalno traktorsko transmisjsko olje (UTTO), namenjeno uporabi v traktorjih in delovnih strojih, kjer se menjalnik, transmisija, zadnji most, mokre zavore in hidravlika mažejo z enim oljem. Lahko se uporablja tudi namensko v menjalnikih in hidravliki drugih vozil in delovnih strojev, za katere sta predpisani kakovost olja API GL-4 in viskoznost SAE 10W-30/15W-30/80W.


GB

High quality universal tractor transmission oil (UTTO), designed for tractors and heavy machinery where the same oil is used for lubricating the transmission gear, transmission, rear axle, wet brakes and hydraulic system. It is also suitable for use in transmission gears and hydraulic systems of other vehicles requiring an API GL-4 quality and SAE 10W-30/15W-30/80W viscosity.

polnjenje / filling

plastenka 10 L; sod 205 L
10L bottle; 205L barrel

DODATKI ZA GORIVA - ADITIVI ADDITIVES



DIESEL PLUS



MULTI-PURPOSE DIESEL FUEL ADDITIVE

SLO

Diesel Plus je večnamenski dodatek za dizelsko gorivo. Čisti ključne sestavne dele sistema za dovod goriva ter jih hkrati ščiti pred nastajanjem oblog in usedlin. Zmanjšuje porabo goriva, preprečuje penjenje goriva in ščiti pred nastankom korozije. Je okolju prijazen, saj zmanjšuje emisije izpušnih plinov v okolje. Izboljša mazanje črpalk goriva pri uporabi dizelskega goriva brez ali z nizko vsebnostjo žvepla. Primeren je za vse vrste dizelskih motorjev.

GB

Diesel Plus is a multi-purpose additive for diesel fuel, produced in accordance with the latest technology. Diesel Plus cleans the key component parts of the fuel supply system, simultaneously protecting the system from deposits and sediments. It provides lower fuel consumption, anti-corrosion protection, and prevents fuel from foaming. Diesel Plus is environment-friendly, as it reduces the emission of exhaust gases. It improves lubrication of the fuel pump when used in combination with sulphur free or low sulphur diesel fuel. It is suitable for all types of diesel engines.

polnjenje / filling

plastenka 300 ML
300ML bottle

BENCIN PLUS



MULTI-PURPOSE PETROL ADDITIVE

SLO

Bencin Plus je večnamenski dodatek za različne vrste motormega bencina. Čisti sestavne dele sistema za dovod goriva (ventile, uplinjač, injektorje in zgorevalni prostor) ter jih hkrati ščiti pred nastajanjem oblog, usedlin in korozije. Zmanjšuje porabo goriva in emisije izpušnih plinov. Primeren je za vse vrste bencinskih motorjev s katalizatorjem in/ali turbopolnilnikom oziroma brez.

GB

Bencin Plus is a highly effective multi-purpose additive for petrol, produced in accordance with the latest technology. Bencin Plus cleans the component parts of the fuel supply system (valves, carburettor, fuel injectors and combustion chamber), simultaneously protecting these parts from deposits, sediments and corrosion. It provides lower consumption of fuel and lower emission of exhaust gases. It is suitable for all types of petrol engines either with or without a catalytic converter and/or turbo charger

polnjenje / filling

plastenka 300 ML
300ML bottle

DPF CLEANER PLUS



DIESEL PARTICULATE FILTER REGENERATION ADDITIVE

SLO

DPF Cleaner je dodatek za dizelsko gorivo, ki pospešuje regeneracijo filtra trdnih delcev (DPF). Znižuje temperaturo vžiga in pospešuje zgorevanje saj in oblog v filtru trdnih delcev, preprečuje zamazitev filtra trdnih delcev in posledično izgubo moči in zmogljivosti motorja, zmanjšuje emisije delcev in podaljšuje življenjsko dobo filtra trdnih delcev. Primeren je za dizelske motorje tudi s common rail in turbopolnilnikom, s standardno vgrajenim ali dodatno vgrajenim filtrom trdnih delcev.


GB

DPF Cleaner is an additive for diesel fuel that accelerates the regeneration of the diesel particulate filter (DPF). It lowers the ignition temperature and accelerates the burning of soot and deposits in the diesel particulate filter, prevents the clogging of the diesel particulate filter and the consequent loss of engine power and performance. It reduces particulate emissions and extends the service life of the diesel particulate filter. DPF Cleaner is suitable for diesel engines, including diesel engines with common rail and turbo injection systems, with a standard or aftermarket diesel particulate filter.

polnjenje / filling

plastenka 300 ML
300ML bottle

DODATKI ZA GORIVA - ADITIVI ADDITIVES

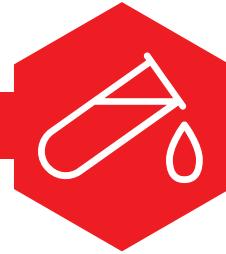

AdBlue



RAZTOPINA SEČNINE V VODI / HIGH PURITY AQUEOUS UREA SOLUTION

specifikacije specifications

ISO 22241-1, DIN 70070, AUS 32

SLO

AdBlue je nestupena 32,5 % razstopina sečnine (urea) v vodi, ki se uporablja za kemično zmanjševanje dušikovih oksidov pri Euro 4, 5 in 6 dieselskih motorjih opremljenimi s SCR katalizatorji.

GB

AdBlue is a non-toxic high-purity 32,5% aqueous urea solution for the secondary treatment of exhaust gases in Euro 4, 5 and 6 heavy duty diesel engines equiped with SCR systems.

polnjenje / filling

plastenka 5 L, 10 L; sod 205 L; zabojniki 1000 L;
avtocisterna
5L,10L bottle; 205L barrel; 1000L container;
tanker

DIESEL WINTER PROTECT



LOW TEMPERATURE DIESEL FUEL ADDITIVE / CONCENTRATED

SLO

Diesel Winter Protect je nizkotemperaturni dodatek za dizelsko gorivo. Preprečuje izločanje kristalov parafina in njihovo usedanje na dno avtomobilskega rezervoarja ter s tem težave, ki se pojavljajo pri nizkih zunanjih temperaturah (mašenje filterov, črpalk in cevovodov). Izboljša filtrirnost (CFPP) goriva. Dodatek učinkuje preventivno, zato ga moramo gorivu dodati, ko je še bistro, njegova temperatura pa nad 5 °C. Primeren je za vse vrste dizelskih motorjev.

GB

Diesel Winter Protect is a highly efficient additive for diesel fuel, suitable for use at low temperature conditions. It prevents the crystals of paraffin from segregating and depositing at the bottom of fuel tanks, thus eliminating the difficulties experienced when outside temperatures are low (plugging of filters, pumps and pipes). It improves the cold filter plugging point of fuel. The additive acts preventively; therefore, it should be added to fuel before any difficulties arise. It is recommended to be added when fuel is still clear and its temperature is above 5 °C. It is suitable for all types of diesel engines.

polnjenje / filling

plastenka 300 ML; pločevinka 1 L (koncentrat)
300ML bottle; 1L can (concentrated)

VENTIL PLUS



LEAD SUBSTITUTE ADDITIVE

SLO

Ventil Plus je dodatek, namenjen zaščiti ventilov in ventilskih sedežev starejših vozil brez katalizatorjev. Ventil Plus tudi čisti sistem za dovod goriva, varuje ga pred rjo in korozijo, zmanjšuje porabo goriva, poleg tega tudi varuje in stabilizira gorivo pri daljšem skladiščenju. S tem zagotavlja lažji in hitrejši zagon motorja po daljšem času shranjevanja goriva.

GB


Ventil Plus is an additive for the protection of valves and poppet valves on old cars that have no catalytic converters. Ventil Plus also cleans the fuel supply system and protects it from rust and corrosion, thus lowering fuel consumption and, at the same time, protecting and stabilising the fuel during prolonged storage. This results in easy and fast engine start-up after a prolonged period of fuel storage.

polnjenje / filling

plastenka 250 ML
250ML bottle

HLADILNE TEKOČINE ANTIFRIZI

COOLING - ANTI-FREEZE FLUIDS

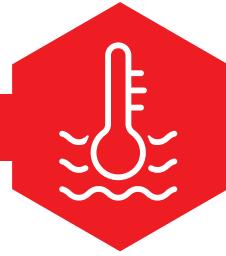

ANTIFRIZ KONCENTRAT



ANTIFRIZ MAX



OAT

specifikacije specifications

MB APPROVAL 325.3, APPROVAL MAN 324 TYP SNF, ASTM D3306, ASTM D6210, ÖNORM V5123, NATO S-759, SAE J1034, BS 6580, UNE 26-361-88/1, KS M 2142, AUDI/VW/SEAT/ŠKODA TL 774D (G12) / TL 774F (G12+), FORD WSS-M97B44-D, GM 6277M, DEUTZ DQC CB-14, FIAT 9,55523, JEMBACHER TA 1000-0200, MAZDA MEZ MN 121 D, DAF 74002, RENAULT 41-01-001/-S TYPE D, MTL 5048, LAND ROVER/JAGUAR STJLR 651.5003, VOLVO TRUCKS, WÄRTSILÄ 32-9011, BMW GS 94000, CAT GCM34, MWM 0199-99-2091/12, FENDT, ISUZU, TEDOM, THERMO KING, LIEBHERR MD1-36-130, LEYLAND TRUCKS DW03245403, MACK 014 GS 17009, YANMAR, SACM DIESEL, SAAB B 040 1065, ITD.

SLO

Antifriz Koncentrat je koncentrirano sredstvo za zaščito vseh vrst hladilnih sistemov in motorjev pred zmrzovanjem in korozijo. Zaščiti najmanj 5 let. Do okolja prijazen. Ne vsebuje nitritov, fosfatov ali silikatov. Pred uporabo ga je treba razredčiti z vodo.

GB

Antifriz Koncentrat is a highly concentrated product that protects all types of cooling systems and prevents freezing and engine corrosion. Provides protection for at least 5 years. Environmentally friendly! Does not contain nitrites, phosphates or silicates. The product must be diluted with water before use.

polnjenje / filling

plastenka 1 L, 3 L in 22 KG; sod 60 KG, 220 KG; kontejner 1000 KG 1L, 3L, 22KG PET bottle; 60KG, 220KG barrel; 1000KG container

SI-OAT

specifikacije specifications

MB APPROVAL 325.5, APPROVAL MAN 324 TYP SI-OAT, BS 6580:2010, ASTM D3306, ASTM D4985, SAE J1034, ÖNORM V 5123, CUNA NC 956-16, JIS K 2234:2006, BUNDESWEHR SY7025, AS 2108-2004, SANS 1251:2005, CHINA GB 29743-2013, MB 325.6, PORSCHE OD MY 1996, VW/AUDI/SEAT/ŠKODA/LAMBORGINI/BENTLEY/BUGATTI TL 774-G, CUMMINS CES 14603, MTL 5048, LIEBHERR MINIMUM LH-01-COL3A, DEUTZ DQC CC-14,

SLO

Antifriz Max je koncentrirano sredstvo na osnovi etilen glikola za zaščito hladilnih sistemov motorjev pred korozijo, zmrzovanjem in pregravanjem. Antifriz Max vsebuje silikatne in organske inhibitorje (Si-OAT antifriz). Pred uporabo ga je treba razredčiti z vodo.


GB

ANTIFRIZ Max is a ethylene glyco engine coolant which protects all types of cooling systems and prevents freezing, overheating and corrosion of engine. Antifriz Max is formulated with a backbone of organic inhibitors in combination with mineral inhibitors (Si-OAT). The product must be diluted with water before use.

polnjenje / filling

plastenka 22 KG; sod 60 KG, 220 KG; kontejner 1000 KG 22KG PET bottle; 60KG, 220KG barrel; 1000KG container

HLADILNE TEKOČINE ANTIFRIZI COOLING - ANTI-FREEZE FLUIDS



ANTIFRIZ PLUS



ANTIFRIZ UNIVERZAL



NF

specifikacije / odobritve
specifications / approvals

MB APPROVAL 325.0, APPROVAL MAN 324 TYP NF
BS 6580:2010, ASTM D 3306, ASTM D 4985, SAE J1034,
AFNOR NF R 15-601, ÖNORM V 5123, CUNA NC 956-16, JIS K
2234:2006, SANS 1251:2005, CHINA GB 29743-2013, AS 2108-
2004, GERMAN ARMY TL 6850-0038/1 VW/AUDI/SEAT/SKODA
TL 774-C, BMW GS 94000, DEUTZ DQC CA-14, JEMBACHER
TA-NR. 1000-0201, LIEBHERR MINIMUM LH-00-COL3A, MTL
5048, GM B 040 0240, PORSCHE 924/928/944/968, SAAB
6901599, VOLVO TRUCK DO MY 2005

SLO

Antifriz Plus je koncentrirano sredstvo na osnovi etilen glikola za zaščito hladilnih sistemov motorjev pred korozijo, zmrzovanjem in pregrrevanjem. Izdelan je po hibridni tehnologiji, ki temelji na uporabi organskih inhibitorjev v kombinaciji s silikatnimi inhibitorji. Pred uporabo ga je treba razredčiti z vodo.

GB

ANTIFRIZ Plus is an ethylene glycol engine coolant which protects cooling systems and prevents freezing and corrosion of engine. It is a hybrid product, which means it is formulated with a backbone of organic inhibitors in combination with mineral inhibitors (silicate). The product must be diluted with water before use.

polnjenje / filling

plastenka 22 KG; sod 60 KG, 220 KG; kontejner 1000 KG
22KG bottle; 60KG, 220KG barrel; 1000KG container

BS

specifikacije
specifications

BRITISH STANDARD BS 6580: 1992 IN BS 6580: 2010

SLO

Antifriz Univerzal je koncentrirano sredstvo za zaščito hladilnih sistemov motorjev pred zmrzovanjem in korozijo na osnovi monoetilenglikola. Izdelan je na osnovi organske tehnologije aditiviranja in ne vsebuje aminov, nitratov, fosfatov in silikatov. Pred uporabo ga je treba razredčiti z vodo.

GB


Antifriz Universal is an undiluted, mono-ethylene-glycol-based antifreeze that protects cooling systems and engines against freezing and corrosion. It is made using organic additive technology and does not contain any amines, nitrates, phosphates and silicates. The product must be diluted with water before use.

polnjenje / filling

plastenka 22 KG; sod 60 KG, 220 KG; kontejner 1000 KG
22KG bottle; 60KG, 220KG barrel; 1000KG container

HLADILNE TEKOČINE ANTIFRIZI

COOLING - ANTI-FREEZE FLUIDS



ANTIFRIZ -40 °C



G12+ DILUTED

specifikacije specifications

MB 326.3, AUDI/VW/SEAT /SKODA TL 774 D/F
(G12/G12+), MAN 324 TYP SNF, FORD WSS-M97B44-D, GM 6277M, ASTM D3306/D6210

SLO
Antifriz -40 °C je razredčeno sredstvo za zaščito vseh vrst hladilnih sistemov in motorjev pred korozijo in zmrzovanjem do -40 °C. Ščiti najmanj 5 let. Do okolja prijazen. Ne vsebuje nitritov, fosfatov ali silikatov. Navodilo za uporabo: Antifriz -40°C nalijemo v hladilni sistem vozila. Dodatno redčenje ni potrebno!

GB
Antifriz -40 °C is a diluted product for the protection of all cooling systems and the prevention of freezing and engine corrosion to -40 °C. Provides protection for at least 5 years. Environmentally friendly! Does not contain nitrites, phosphates or silicates. Instructions for use: Pour Antifriz -40 °C into the cooling system of the automobile. Do not dilute with water!

polnjenje / filling

plastenka 1 L, 3 L; sod 60 KG, 220 KG; kontejner 1000 KG
1L, 3L bottle; 60KG, 220KG barrel; 1000KG container

ANTIFRIZ G13



G13

specifikacije specifications

VW TL 774 J (G13)

SLO
Antifriz G13 je koncentrirano sredstvo za zaščito hladilnih sistemov motorjev pred zmrzovanjem na osnovi etilen glikola. Izdelan je po tehnologiji »lobrid«, ki temelji na uporabi organskih inhibitorjev v kombinaciji z mineralnimi inhibitorji, in nudi poleg zaščite pred zmrzovanjem in vrenjem tudi dolgorajno zaščito pred korozijo. Pred uporabo ga je treba razredčiti z vodo.

GB
Antifriz G13 is a ethylene glyco engine coolant which protects all types of cooling systems and prevents freezing and corrosion of engine. It is a lobrid product, which means it is formulated with a backbone of organic inhibitors in combination with mineral inhibitors (silicate). Hence it delivers not only maintenance-free protection against freezing and boiling but also long-lasting protection against corrosion. The product must be diluted with water before use.

polnjenje / filling

plastenka 22 KG; sod 60 KG, 220 KG; kontejner 1000 KG
22KG bottle; 60KG, 220KG barrel; 1000KG container

ANTIFRIZ G11



G11

specifikacije / odobritve specifications / approvals

VW TL 774C (G11)


SLO
Antifriz G11 je koncentrirano sredstvo za zaščito hladilnih sistemov starejših vozil koncerna VW (VW, Audi, Škoda, Seat) pred zmrzovanjem in vodo. Pred uporabo ga je treba razredčiti z vodo.

GB
Antifriz G11 is a concentrated antifreeze designed to protect the cooling systems of older VW Group vehicles (VW, Audi, Škoda, Seat) against freezing and corrosion. The product must be diluted with water before use.

polnjenje / filling

sod 60 KG, 220 KG; kontejner 1000 KG
60KG, 220KG barrel; 1000KG container

HIDRAVLIČNA OLJA HYDRAULIC OILS



HIDROL HLP 32



HYDRAULIC OIL

specifikacije specifications

ISO 6743/4 L-HM, ISO 11158 L-HM, DIN 51524/2 HLP, SPERRY VICKERS M-2950-S/I-286-S, DENISON HF-0/HF-1/HF-2, AFNOR NF E 48-603:HM, US STEEL 127, CINCINNATI MILACRON P68/69/70

SLO

Hidrol HLP 32 je kakovostno hidravlično olje na osnovi visoko rafiniranega parafinskega baznega olja in posebej izbranih aditivov proti obrabi (AW in EP), koroziji, staranju in proti penjenju. Hidrol HLP 32 je namenjen uporabi v večini industrijskih hidravličnih in cirkulacijskih sistemih, ki zahtevajo zaščito pred obrabo.

GB

Hidrol HLP 32 is a quality hydraulic oil based on highly refined mineral base oil enhanced with special selection of AW, EP and antiwear additives, antioxidants and corrosion inhibitors. This oil is designed for use in industrial hydraulic and circulating systems which require anti-wear protection.

polnjenje / filling

plastenka 10 L; sod 205 L
10L bottle: 205L barrel

HIDROL HLP 46



HYDRAULIC OIL

specifikacije specifications

ISO 6743/4 L-HM, ISO 11158 L-HM, DIN 51524/2 HLP, SPERRY VICKERS M-2950-S/I-286-S, DENISON HF-0/HF-1/HF-2, AFNOR NF E 48-603:HM, US STEEL 127, CINCINNATI MILACRON P68/69/70

SLO

Hidrol HLP 46 je kakovostno hidravlično olje na osnovi visoko rafiniranega parafinskega baznega olja in posebej izbranih aditivov proti obrabi (AW in EP), koroziji, staranju in proti penjenju. Hidrol HLP 46 je namenjen uporabi v večini industrijskih hidravličnih in cirkulacijskih sistemih, ki zahtevajo zaščito pred obrabo.

GB

Hidrol HLP 46 is a quality hydraulic oil based on highly refined mineral base oil enhanced with special selection of AW, EP and anti wear additives, antioxidants and corrosion inhibitors. This oil is designed for use in industrial hydraulic and circulating systems which require anti-wear protection.

polnjenje / filling

plastenka 10 L; sod 205 L
10L bottle: 205L barrel

HIDROL HLP 68



HYDRAULIC OIL

specifikacije specifications

ISO 6743/4 L-HM, ISO 11158 L-HM, DIN 51524/2 HLP, SPERRY VICKERS M-2950-S/I-286-S, DENISON HF-0/HF-1/HF-2, AFNOR NF E 48-603:HM, US STEEL 127, CINCINNATI MILACRON P68/69/70

SLO

Hidrol HLP 68 je kakovostno hidravlično olje na osnovi visoko rafiniranega parafinskega baznega olja in posebej izbranih aditivov proti obrabi (AW in EP), koroziji, staranju in proti penjenju. Hidrol HLP 68 je namenjen uporabi v večini industrijskih hidravličnih in cirkulacijskih sistemih, ki zahtevajo zaščito pred obrabo.


GB

Hidrol HLP 68 is a quality hydraulic oil based on highly refined mineral base oil enhanced with special selection of AW, EP and anti foam additives, antioxidants and corrosion inhibitors. This oil is designed for use in industrial hydraulic and circulating systems which require anti wear protection.

polnjenje / filling

plastenka 10 L; sod 205 L
10L bottle: 205L barrel

HIDRAVLIČNA OLJA HYDRAULIC OILS



HIDROL HVLP 32



HYDRAULIC OIL

specifikacije specifications

DIN 51 524/3 HVLP, ISO 6743/4 L-HV, ISO 11158 L-HV, DENISON HF-0, AFNOR NF E 48- 603 HV, SPERRY VICKERS M-2950-S/I-286-S

SLO

Hidrol HVLP 32 je vrhunsko hidravlično olje s povišanim indeksom viskoznosti namenjeno uporabi v hidravličnih in cirkulacijskih sistemih za prenos moči v kmetijskih, gradbenih in gozdarskih strojih ter v večini industrijskih hidravličnih in cirkulacijskih sistemih, ki obratujejo v pogojih večjih temperaturnih sprememb.

GB

Hydrol HVLP 32 is a premium hydraulic oil with a high viscosity index for use in hydraulic and circulating power transmission systems in agricultural, construction and forestry machinery, as well as in most industrial hydraulic and circulating systems operating under significant temperature changes.

polnjenje / filling

plasterka 10 L; sod 205 L
10L bottle; 205L barrel

HIDROL HVLP 46



HYDRAULIC OIL

specifikacije specifications

DIN 51 524/3 HVLP, ISO 6743/4 L-HV, ISO 11158 L-HV, DENISON HF-0, AFNOR NF E 48- 603 HV, SPERRY VICKERS M-2950-S/I-286-S

SLO

Hidrol HVLP 46 je vrhunsko hidravlično olje s povišanim indeksom viskoznosti namenjeno uporabi v hidravličnih in cirkulacijskih sistemih za prenos moči v kmetijskih, gradbenih in gozdarskih strojih ter v večini industrijskih hidravličnih in cirkulacijskih sistemih, ki obratujejo v pogojih večjih temperaturnih sprememb.

GB

Hydrol HVLP 46 is a premium hydraulic oil with a high viscosity index for use in hydraulic and circulating power transmission systems in agricultural, construction and forestry machinery, as well as in most industrial hydraulic and circulating systems operating under significant temperature changes.

polnjenje / filling

plasterka 10 L; sod 205 L
10L bottle; 205L barrel

HIDROL HVLP 68



HYDRAULIC OIL

specifikacije specifications

DIN 51 524/3 HVLP, ISO 6743/4 L-HV, ISO 11158 L-HV, DENISON HF-0, AFNOR NF E 48- 603 HV, SPERRY VICKERS M-2950-S/I-286-S

SLO

Hidrol HVLP 68 je vrhunsko hidravlično olje s povišanim indeksom viskoznosti namenjeno uporabi v hidravličnih in cirkulacijskih sistemih za prenos moči v kmetijskih, gradbenih in gozdarskih strojih ter v večini industrijskih hidravličnih in cirkulacijskih sistemih, ki obratujejo v pogojih večjih temperaturnih sprememb.

GB


Hydrol HVLP 68 is a premium hydraulic oil with a high viscosity index for use in hydraulic and circulating power transmission systems in agricultural, construction and forestry machinery, as well as in most industrial hydraulic and circulating systems operating under significant temperature changes.

polnjenje / filling

plasterka 10 L; sod 205 L
10L bottle; 205L barrel

OLJE ZA REDUKTORJE

REDUCTION GEAR OILS



REDOL
CLP 68



REDOL
CLP 150



REDOL
CLP 220



REDUCTION GEAR OIL

specifikacije specifications

DIN 51517/3 CLP, ISO L-CKD, US STEEL 224

SLO

Je visokokakovostno olje za industrijska gonia (reduktorje) namenjeno mazanju visoko obremenjenih industrijskih zaprtih zobiških prenosov. Odlično prenaša največje obremenitve, preprečuje obrabo, zmanjšuje trenje in vibracije. Dobro izloča vodo, zrak in je odporno proti penjenju.

GB

A high-quality industrial (reducer) gear oil designed for lubrication of heavy-duty industrial enclosed gear drives. Excellent in withstanding peak loads, preventing wear and reducing friction and vibration. It ensures good water and air separation and is resistant to foaming.

polnjenje / filling

plastenka 10 L; sod 205 L
10L bottle; 205L barrel

REDUCTION GEAR OIL

specifikacije specifications

DIN 51517/3 CLP, ISO L-CKD, US STEEL 224

SLO

Je visokokakovostno olje za industrijska gonia (reduktorje) namenjeno mazanju visoko obremenjenih industrijskih zaprtih zobiških prenosov. Odlično prenaša največje obremenitve, preprečuje obrabo, zmanjšuje trenje in vibracije. Dobro izloča vodo, zrak in je odporno proti penjenju.

GB

A high-quality industrial (reducer) gear oil designed for lubrication of heavy-duty industrial enclosed gear drives. Excellent in withstanding peak loads, preventing wear and reducing friction and vibration. It ensures good water and air separation and is resistant to foaming.

polnjenje / filling

plastenka 10 L; sod 205 L
10L bottle; 205L barrel

REDUCTION GEAR OIL

specifikacije specifications

DIN 51517/3 CLP, ISO L-CKD, US STEEL 224

SLO

Je visokokakovostno olje za industrijska gonia (reduktorje) namenjeno mazanju visoko obremenjenih industrijskih zaprtih zobiških prenosov. Odlično prenaša največje obremenitve, preprečuje obrabo, zmanjšuje trenje in vibracije. Dobro izloča vodo, zrak in je odporno proti penjenju.


GB

A high-quality industrial (reducer) gear oil designed for lubrication of heavy-duty industrial enclosed gear drives. Excellent in withstanding peak loads, preventing wear and reducing friction and vibration. It ensures good water and air separation and is resistant to foaming.

polnjenje / filling

plastenka 10 L; sod 205 L
10L bottle; 205L barrel

MINERALNA OLJA MINERAL OILS



POLAR 68



POLAR 150



POLAR 220



MINERAL OIL

specifikacije specifications

ISO 11158 HG (VG 68), ISO 6743/4 HG (VG 68), MAG CINCINNATI-MACHINE P-47 (VG 68), P-50 (VG 220), ISO 6743/13 L-G (VG 150, VG 220), ISO 19378 G-A (VG 150, ISO VG 220)

SLO

Mineralna olja namenjena mazanju linearnih in krožnih vodil, horizontalnih in vertikalnih drsnih stez. Olja imajo odlične mazalne lastnosti, še posebej pri visokih obremenitvah in nizkih hitrostih, tako da preprečujejo t.i. »StickSlip« pojav. Olja zagotavljajo visoko oksidacijsko in termično stabilnost; odlične mazalne lastnosti; učinkovita zaščita pred korozijo in rjo, gladko in natančno drsenje, dobre adhezijske lastnosti, učinkovito ločevanje vode in vodotopnih snovi.

GB

Mineral oils for lubricating linear and circular tracks and horizontal and vertical trackways. The oils have excellent lubricating properties, especially at high loads and low speeds, preventing the stick-slip phenomenon. The oils have a high oxidation and thermal stability and excellent lubricating properties and provide effective protection against corrosion and rust, as well as ensure smooth and precise sliding, good adhesion properties and effective separation of water and water-soluble substances.

polnjenje / filling

plastenka 10 L; sod 205 L
10L bottle; 205L barrel

MINERAL OIL

specifikacije specifications

ISO 11158 HG (VG 68), ISO 6743/4 HG (VG 68), MAG CINCINNATI-MACHINE P-47 (VG 68), P-50 (VG 220), ISO 6743/13 L-G (VG 150, VG 220), ISO 19378 G-A (VG 150, ISO VG 220)

SLO

Mineralna olja namenjena mazanju linearnih in krožnih vodil, horizontalnih in vertikalnih drsnih stez. Olja imajo odlične mazalne lastnosti, še posebej pri visokih obremenitvah in nizkih hitrostih, tako da preprečujejo t.i. »StickSlip« pojav. Olja zagotavljajo visoko oksidacijsko in termično stabilnost; odlične mazalne lastnosti; učinkovita zaščita pred korozijo in rjo, gladko in natančno drsenje, dobre adhezijske lastnosti, učinkovito ločevanje vode in vodotopnih snovi.

GB

Mineral oils for lubricating linear and circular tracks and horizontal and vertical trackways. The oils have excellent lubricating properties, especially at high loads and low speeds, preventing the stick-slip phenomenon. The oils have a high oxidation and thermal stability and excellent lubricating properties and provide effective protection against corrosion and rust, as well as ensure smooth and precise sliding, good adhesion properties and effective separation of water and water-soluble substances.

polnjenje / filling

plastenka 10 L; sod 205 L
10L bottle; 205L barrel

MINERAL OIL

specifikacije specifications

ISO 11158 HG (VG 68), ISO 6743/4 HG (VG 68), MAG CINCINNATI-MACHINE P-47 (VG 68), P-50 (VG 220), ISO 6743/13 L-G (VG 150, VG 220), ISO 19378 G-A (VG 150, ISO VG 220)

SLO

Mineralna olja namenjena mazanju linearnih in krožnih vodil, horizontalnih in vertikalnih drsnih stez. Olja imajo odlične mazalne lastnosti, še posebej pri visokih obremenitvah in nizkih hitrostih, tako da preprečujejo t.i. »StickSlip« pojav. Olja zagotavljajo visoko oksidacijsko in termično stabilnost; odlične mazalne lastnosti; učinkovita zaščita pred korozijo in rjo, gladko in natančno drsenje, dobre adhezijske lastnosti, učinkovito ločevanje vode in vodotopnih snovi.


GB

Mineral oils for lubricating linear and circular tracks and horizontal and vertical trackways. The oils have excellent lubricating properties, especially at high loads and low speeds, preventing the stick-slip phenomenon. The oils have a high oxidation and thermal stability and excellent lubricating properties and provide effective protection against corrosion and rust, as well as ensure smooth and precise sliding, good adhesion properties and effective separation of water and water-soluble substances.

polnjenje / filling

plastenka 10 L; sod 205 L
10L bottle; 205L barrel

MASTI GREASES



LIT
2



LITHIUM

specifikacije
specifications

DIN 51 825 K2K-20

SLO

Lit 2 je večnamenska mineralna mazalna mast z zgoščevalcem na osnovi litijevega mila višjih maščobnih kislin ter dodatkov proti koroziji in staranju. Uporablja se za mazanje manj obremenjenih kotalnih in drsnih ležajev, zglobov, vodil in drugih strojnih elementov. Temperaturno območje uporabe je od -25 °C do 130 °C.

GB

Lit 2 is a high quality all purpose mineral based lubricating grease with lithium thickener, corrosion inhibitors, and antioxidants. It is used for all types of rolling and journal bearings, joints, guides and other machine elements. Operating temperature range is from -25°C to 130°C.

polnjenje / filling

kartuša 400 G; plastenka 1 KG
400G cartridge; 1KG bottle

LIT
EP 2



LITHIUM EP

specifikacije
specifications

DIN 51 825 KP2K-30

SLO

Lit EP 2 je večnamenska mineralna mazalna mast z EP (Extreme Pressure) dodatki ter dodatki proti koroziji in staranju. Zgoščvalec je litijovo milo višjih maščobnih kislin. Uporablja se za mazanje delov, ki prenašajo visoke obremenitve, ležaji, osi, zglobi in ostali strojni elementi. Temperaturno območje uporabe je od -30 do +130 °C.

GB

Lit EP 2 is a high quality all purpose mineral based EP (Extreme Pressure) lubricating grease with lithium thickener, corrosion inhibitors and antioxidants. It is used for highly loaded rolling and journal bearings, joints, guides and other machine elements. Operating temperature range is from -30°C to 130°C.

polnjenje / filling

kartuša 400 G; plastenka 1 KG
400G cartridge; 1KG bottle

SREDSTVA ZA VZDRŽEVANJE IN ČIŠČENJE CARE PRODUCTS



DESTILIRANA VODA



**ZA AKUMULATORJE, HLAĐILNIKE IN LIKALNIKE /
DESTILLED WATER FOR BATTERY,
RADIATOR AND IRONS**

SLO

Destilirana voda za akumulatorje, avtomobilske hladilnike in likalnike.

GB

Distilled water for batteries, radiators and irons.

polnjenje / filling

PET plastenka 1 L, 5 L, 10 L, 50 L, 1000 L
1L, 5L, 10L, 50L, 1000L PET bottles

UNIVERZAL CLEANER



RAZMASTILNO SREDSTVO V SPREJU / DEGREASER SPRAY

SLO

UNIVERZAL CLEANER je večnamensko razmastilno sredstvo v spreju. Odstrani olje, mast, umazanijo iz strojnih delov in zavorno tekočino iz zavornih diskov in cilindrov.

GB

Universal Cleaner is a multi-purpose degreasing spray. It removes oil, grease and dirt from machine components and braking fluid from brake discs and cylinders.

polnjenje / filling

pločevinka 500 ML
500ML can

SPRAY MOTOR



SPREJ ZA ČIŠČENJE MOTORJA / MOTOR SPRAY

SLO

Motor Spray za zunanje pranje motorja, odstranjuje olje, mast in umazanijo z avtomobilskega motorja. Čisti hitro in temeljito. Navodilo za uporabo: Dozo pred uporabo pretresite. Razpršite po površini motorja, pustite nekaj minut in sperite s curkom tople ali hladne vode. Če je potrebno, postopek ponovite. Specialni ventil vam omogoča uporabo doze v vseh položajih.

GB


Engine Spray for cleaning the engine surfaces, Engine spray is a powerful cleaning agent which removes oil, grease and dirt. It cleans quickly and effectively. Instructions for use: Shake the container well before use. Spray the cleaning agent on the engine surfaces and give it few minutes to take effect. Rinse thoroughly with warm or cold water. For extremely grimy surfaces you may also need to repeat the procedure. A special trigger enables you to use the bottle in all positions.

polnjenje / filling

pločevinka 500 ML
can 500ML

SREDSTVA ZA VZDRŽEVANJE IN ČIŠČENJE

CARE PRODUCTS



AVTOŠAMPON KONCENTRAT NANO



**ODBOJ KAPLJIC Z NANO
TEHNOLOGIJO /
CAR SHAMPOO CONCENTRATE WITH
WAX PROTECTION**

SLO

Šampon za ročno pranje avtomobilov s posebno formulo površinsko aktivnih snovi, ki omogočajo hitro odtekanje vode in s tem hitro sušenje opranega avtomobila. Film, ki ostane na površni, odbija kapljice nečistoč in tako ščiti pred trdovratno umazanjijo in zagotavlja lesk. Šampon ne vsebuje fosfatov in je varen za uporabo na vseh vrstah avtomobilskih lakov in ostalih avtomobilskih materialov (kovina, steklo, plastika, guma).

GB

This shampoo for hand car washing implements a special formula of surfactants, which facilitates the draining of water so the washed car dries faster. The film that is left on the surface repels drops of dirt, protecting the car from persistent dirt and giving it a lasting shine. The shampoo does not contain phosphates and is safe for use with all types of car varnish and other materials (metal, glass, plastic, rubber).

polnjenje / filling

PET plastrinka 1 L
1L PET bottle

AVTOŠAMPON KONCENTRAT GREEN LEMON



**Z VELIKO MOČJO ODSTRANJEVANJA
NEČISTOČ /
CAR SHAMPOO CONCENTRATE WITH
STRONG CLEANING EFFECT**

SLO

Šampon za ročno pranje avtomobilov z visoko koncentrirano formulo čisti hitro, učinkovito in zagotavlja ekonomično uporabo. Šampon je pH neutral in ne vsebuje fosfatov, je nežen do kovine, laka, gume in stekla.

GB

This shampoo for hand car washing with a highly concentrated formula ensures fast, effective cleaning and economic use. The shampoo is pH neutral, does not contain phosphates and is safe for use with metal, varnish, rubber and glass.

polnjenje / filling

PET plastrinka 1 L
1L PET bottle

AVTOŠAMPON KONCENTRAT SHINE



**Z VELIKO MOČJO ODSTRANJEVANJA
NEČISTOČ /
CAR SHAMPOO CONCENTRATE WITH
STRONG CLEANING EFFECT**

SLO

Šampon za ročno pranje avtomobilov čisti hitro in učinkovito. Je pH neutralen in ne vsebuje fosfatov. Je nežen do kovine, laka, gume, stekla, polikarbonatna stekla in vseh ostalih materialov, ki so običajna za avtomobile. Vsebuje sinergijsko zmes površinsko aktivnih snovi, ki dajejo močno peno in izredno učinkovito odstranjujejo tipično avtomobilsko umazanijo.


GB

This shampoo for hand car washing with a highly concentrated formula ensures fast, effective cleaning and economic use. The shampoo is pH neutral, does not contain phosphates and is safe for use with metal, varnish, rubber and glass.

polnjenje / filling

PET plastrinka 1 L
1L PET bottle

SREDSTVA ZA VZDRŽEVANJE IN ČIŠČENJE CARE PRODUCTS



VITREX KONCENTRAT LIMETA



**SREDSTVO ZA LETNO ČIŠČENJE
VETROBRANSKIH STEKEL / ALL
PURPOSE CLEANING FOR WINDSHIELDS**

SLO

Vitrex Limeta je koncentrirano čistilo za vetrobranska stekla, ki se doda vodi za čiščenje vetrobranskega stekla. Odstranjuje ostanke insektov, olja in drugih nečistoč, ki ovirajo pogled skozi vetrobransko steklo in s tem varno vožnjo. Navodilo za uporabo: Vsebina plastenke zadošča za pripravo 5 litrov čistilne raztopine. Ustrezno količino izdelka nalijemo v rezervoar in dopolnimo z vodo.. Ustrezno odmerjanje prihrani stroške in zmanjša vplive na okolje. Sestavine: < 5 % neionske površinsko aktivne snovi; parfum, konzervans (Methylchloroisothiazolinone, Methylisothiazolinone).

GB

Vitrex Lime is a concentrated windscreen detergent to be added to water for cleaning windscreens. It removes remains of insects, oil and other pieces of dirt that obstruct the view through the windscreens and thus impede safe driving. Instructions for use: The contents of the bottle suffice for 5 liters of cleaning solution. Pour a suitable amount of detergent into the wind-screen washer reservoir and add water. Correct dosing will save costs and reduce influence on the environment. Ingredients: < 5% non-ionic surfactants; perfume; preservative (Methylchloroisothiazolinone, Methylisothiazolinone).

polnjenje / filling

PET plastenka 1 L; sod 50 L
1L PET bottle; barrel 50L

VITREX KONCENTRAT SUMMER BREEZE



**SREDSTVO ZA LETNO ČIŠČENJE
VETROBRANSKIH STEKEL /
WINDSHIELD CLEANSER**

SLO

Vitrex Summer Breeze je koncentrirano čistilo za vetrobranska stekla. Odstranjuje ostanke insektov, olja in drugih nečistoč, ki ovirajo pogled skozi vetrobransko steklo in s tem varno vožnjo. Vsebina plastenke zadošča za pripravo 5 litrov čistilne raztopine. Ustrezno količino sredstva nalijemo v rezervoar in dopolnimo z vodo. Sestavine: < 5% anionske in neionske površinsko aktivne snovi; parfum, konzervans (Methylchloroisothiazolinone, Methylisothiazolinone).


GB

Vitrex Summer Breeze is a concentrated detergent to be added to water for cleaning windscreens. It removes remains of insects, oil and other pieces of dirt that obstruct the view through the windscreens and thus impede safe driving. Instructions for use: The contents of the bottle suffice for 5 liters of cleaning solution. Pour a suitable amount of detergent into the windscreens washer reservoir and add water. Ingredients: < 5% anionic and non-ionic surfactants; perfume; preservative (Methylchloroisothiazolinone, Methylisothiazolinone).

polnjenje / filling

PET plastenka 1 L
1L PET bottle

SREDSTVA ZA VZDRŽEVANJE IN ČIŠČENJE CARE PRODUCTS



VITREX

VANILIJA



VITREX

SIVKA



SREDSTVO ZA LETNO ČIŠČENJE VETROBRANSKIH STEKEL / WINDSHIELD CLEANSER

SLO

Vitrex vanilija je pripravljeno čistilo za vetrobranska stekla. Odstranjuje ostanke insektov, olja in drugih nečistoč, ki ovirajo pogled skozi vetrobransko steklo in s tem varno vožnjo. Navodilo za uporabo: Vsebina plostenke je pripravljena za uporabo. Izdelek se vlije v rezervoar za čistilo, redčenje z vodo ni potrebno. Sestavine: < 5 % anionske in neionske površinsko aktivne snovi, parfum, konzervans (Methylchloroisothiazolinone, Methylisothiazolinone). Opozorila: Vsebuje reakcijsko zmes 5-kloro-2-metil-4-izothiazolin-3-on in 2-metil-2H-izotiazol- -3-on (3:1).

GB

Vitrex Vanilla is a ready mix windscreen cleaning solution. It removes insect remains, oil and other dirt that obstruct the view through the windscreens and thus impede safe driving. Instructions for use: The contents of the bottle are ready for use. Pour the solution into the windscreen washer fluid tank. Do not dilute with water. Ingredients: < 5 % anionic and non-ionic surfactants; perfume; preservative (Methylchloroisothiazolinone, Methylisothiazolinone).

Note: Contains reaction mass of: 5-chloro-2-methyl-4-isothiazolin-3-one and 2-methyl-2H-isothiazol-3-one (3:1).

polnjenje / filling

PET plostenka 3 L
3L PET bottle

SREDSTVO ZA LETNO ČIŠČENJE VETROBRANSKIH STEKEL / WINDSHIELD CLEANSER

SLO

Vitrex sivka je pripravljeno čistilo za vetrobranska stekla. Odstranjuje ostanke insektov, olja in drugih nečistoč, ki ovirajo pogled skozi vetrobransko steklo in s tem varno vožnjo. Navodilo za uporabo: Vsebina plostenke je pripravljena za uporabo. Izdelek se vlije v rezervoar za čistilo, redčenje z vodo ni potrebno. Sestavine: < 5 % anionske in neionske površinsko aktivne snovi, parfum, konzervans (Methylchloroisothiazolinone, Methylisothiazolinone). Opozorila: Vsebuje reakcijsko zmes 5-kloro-2-metil-4-izothiazolin-3-on in 2-metil-2H-izotiazol- -3-on (3:1).

GB


Vitrex Lavender is a ready mix windscreen cleaning solution. It removes insect remains, oil and other dirt that obstruct the view through the windscreens and thus impede safe driving. Instructions for use: The contents of the bottle are ready for use. Pour the solution into the windscreen washer fluid tank. Do not dilute with water. Ingredients: < 5 % anionic and non-ionic surfactants; perfume; preservative (Methylchloroisothiazolinone, Methylisothiazolinone).

Note: Contains reaction mass of: 5-chloro-2-methyl-4-isothiazolin-3-one and 2-methyl-2H-isothiazol-3-one (3:1).

polnjenje / filling

PET plostenka 3 L
3L PET bottle

ZIMSKA SREDSTVA ZA VZDRŽEVANJE IN ČIŠČENJE WINTER CARE PRODUCTS



VITREX

-38°C



TEKOČINA ZA ČIŠČENJE IN ZAŠČITO VETROBRANSKIH STEKEL PRED ZMRZOVANJEM /
ANTI-FREEZE FLUID FOR CLEANING AND PROTECTING WINDSHIELDS

SLO

Vitrex -38 °C je tekočina za čiščenje vetrobranskih stekel in njihovo zaščito pred zmrzovanjem. Učinkuje večkratno: ščiti pred zmrzovanjem, preprečuje zaledenitev vodnih šob, čisti steklo in odstranjuje insekte. Odišavljeno. Sestavine: <5 % neionske površinsko aktivne snovi; parfum.

GB

Vitrex -38°C is a solution that cleans windscreens and protects them from freezing. It has multiple effects: protects the windscreen from freezing, prevents the freezing of windscreen washer jets, cleans the windscreen and removes insects. Scented. Ingredients: <5 % non-ionic surfactants, perfume.

polnjenje / filling

PET plastenka 1 L in 3 L; sod 50 L
1L, 3L PET bottle; 50L barrel

VITREX

-20°C JABOLKO



TEKOČINA ZA ČIŠČENJE IN ZAŠČITO VETROBRANSKIH STEKEL PRED ZMRZOVANJEM /
ANTI-FREEZE FLUID FOR CLEANING AND PROTECTING WINDSHIELDS

SLO

Vitrex -20 °C z vonjem jabolka je tekočina za čiščenje vetrobranskih stekel in njihovo zaščito pred zmrzovanjem. Učinkuje večkratno: Ščiti pred zamrzovanjem, preprečuje zaledenitev vodnih šob, čisti steklo in odstranjuje insekte. Kompatibilno z vsemi materiali s katerimi pri predpisani uporabi pride v stik. Ne vsebuje alergenov. Vsebina plostenke je pripravljena za uporabo, ročaj močno olajša pretakanje. Izdelek se vlije v rezervoar za čistilo, redčenje z vodo ni potrebno. Za uporabo poleti se lahko redči z vodo v razmerju 1:2. Sestavine: < 5 % neionske površinsko aktivne snovi; parfum.

GB

Vitrex -20°C is a solution that cleans windscreens and protects them from freezing. It has multiple effects: protects the windscreen from freezing, prevents the freezing of windscreen washer jets, cleans the windscreen and removes insects. Apple scented, < 5 % non-ionic surfactants, perfume.

polnjenje / filling

PET plastenka 3 L
3L PET bottle

ZIMSKA SREDSTVA ZA
VZDRŽEVANJE
WINTER CARE
PRODUCTS



ODMRZOVALEC
STEKEL



ODMRZOVALEC STEKEL /
GLASS DE-ICER

SLO

Odmrzovalec stekel v sekundi odtali zamrznjena stekla. Preprečuje ponovno zamrznitev. Skrbi za čisti pogled.


GB

Glass de-icer melts frost on glass surfaces instantly. It prevents further freezing and helps to keep the windshield clear.

polnjenje / filling

plasterka 500 ML
500ML bottle

OSVEŽILCI
ZRAKA
AIR FRESHENER



OSVEŽILEC ZRAKA
Q



OSVEŽILEC ZRAKA /
AIR FRESHENER

SLO

Učinkovit osvežilec za uporabo kjerkoli želimo ustvariti prijeten vonj. Najbolj priljubljen je za uporabo v avtomobilu. Vonji: vanilija, češnja, zeleno jabolko in Sport Fresh.

GB


An effective air freshener bringing a pleasant scent to any space. Most frequently chosen to freshen up cars. Scents: Vanilla, Cherry, Green Apple and Sport Fresh.

BELEŽKE / NOTES

KONTAKT

**Petrol d.d., Ljubljana
Poslovne rešitve**
+386 1 586 35 35
poslovne.resitve@petrol.si

Prodajni predstavniki:





PETROL

Energija za življenje